



SCALE 8/1

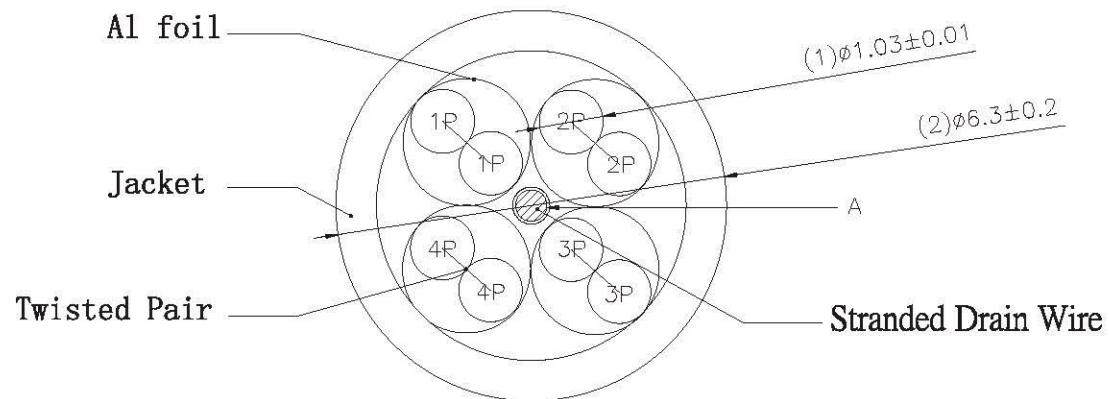

SCALE 1/2

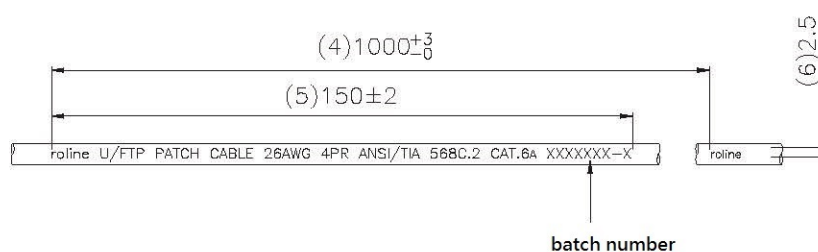


SCALE 1/1

roline U/FTP PATCH CABLE 26AWG 4PR ANSI/TIA 568C.2 CAT.6A XXXXXX-X

Specification:

- Twisted pair wiring: T568B
- Copper conductor: 26 AWG
- XXXXXXX-X: Batch number
- Print legend: grey color with blue printing
- Jacket material: PVC
- Conductor OD:
 - Blue & White/Blue: 1.03 ± 0.01
 - Green & White/Green: 1.03 ± 0.01
 - Orange & White/ Orange: 1.03 ± 0.01
 - Brown & White/ Brown: 1.03 ± 0.01
- Please add meter printing
0001、0002、0003.....9999 at the end of patch cord if they will
be shipped as cable products
(Please be noted that printing without "M")

Item no.		21.15.1682				
Description		ROLINE Cat. 6a UTP Lan Cable, stranded, 300m, grey				
"##": Matching DIM. "*: Important DIM. Others General DIM.	DRAWING	19.Au1.2014	byz			
	CHECK	19.Au1.2014	Jane			
	APPROVAL	19.Au1.2014	Frank			
GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1			DATE	NAME		
	SCALE	1/1 (A4)	UNIT	mm		
			DRAWING NO.			
			DRAWING CLASSIFICATION			
		S	SHEET	1 OF 1		

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER
-----	---------------	----------	--------	------	----------