



P1
Mini DP Male



Dust Cover




②⑤⑥⑦

L±20


①

P2
DP Male



41.5±0.3


③④⑥⑦

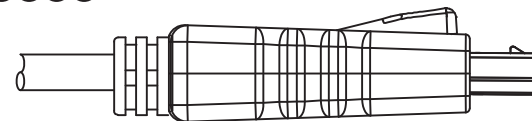

Dust Cover



Pin Assignment

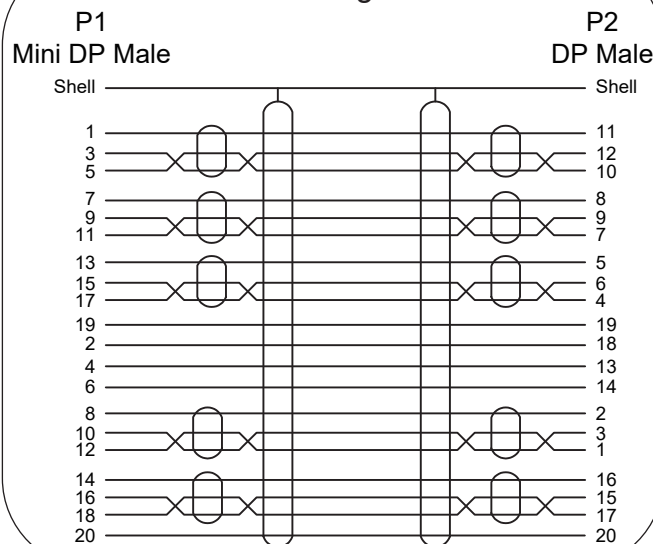

Specification :

- Cable UL20276, (32AWG*1P+D+AL/MY)*5C+32AWG*4C+AL+D+B, Jacket: PVC, Color: BLACK, OD: 6.0mm
- Conn. Mini DP Male, Insulator: White, Shell: Gold Plated
- Conn. DP Male, Insulator: Black, Shell: Gold Plated
- Hood For DP CONNECTOR, ABS, Color: Black
- Hood For Mini DP Male, ABS, Color: Black
- Inner Molding PE
- Outer Molding PVC: 45P, Color: BLACK

Note: (Mini DP to DP Real Machine Detection)

- Source Resolution: 7680*4320 Refresh Rate: 60Hz
- Video Was Like No Jitter, Smearing, Ghosting, Lack of Color and Other Display Abnormalities

Part No.	Length	Resistance
11.04.5814	1000 mm	2ohm
11.04.5815	2000 mm	2ohm

Rev.	Date	Contents of Change	Designer	Tol±	Pl	Met	Ins	Por	Cab	Pac	Gas	Dis	Approve	Check	Draw	Design	Product Name	Product No.
1				Range	0~6	0.1	0.1	0.1	0.2	0.5	1	0.5	0.2	Allen	Allen		ROLINE Mini DisplayPort Cable, v1.3/1.4, mDP-DP, M/M,black	11.04.5814/11.04.5815
2				6~30	0.1	0.1	.15	.25	1	1	0.5	.25					2017-11-20	
3				30~80	0.1	.15	.25	0.3	2	1.5	1	0.3						
4				80~180	.15	.15	.25	0.3	2	2	1	.45						
5				180~315	.15	0.2	0.3	0.4	2.5	2	1	0.6						
6				315~800	0.2	0.3	0.4	0.5	3	3	2	1.1						