

WIRE-WRAP WIRES

TYPE AZT, WZT, WZ xxxx SPC or SPCA

-90°C / +200°C

ETFE
250 / 350 / 600 Volts AC

SPECIFICATIONS

Conductor : ASTM-B-224 ASTM-B-298 ASTM-B-624

Insulation : ASTM-D-3159

Insulated wire : NF-C-93522


Standard colours

See page III

Other colours
upon request

B C D E F G H J K L

PRIMARY WIRE

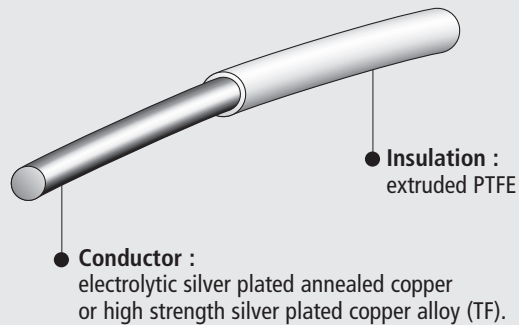

AXON' REFERENCE	NF REFERENCE	AWG	Construction	Conductor nominal $\varnothing$ (mm)	Conductor nominal area (mm ²)	Conductor nominal resistance (Ω /100m)	Insulated wire nom. $\varnothing$ (mm)	Approx. weight (g/m)	Voltage rating (V AC)
AZT 3001		30	1x0.254	0.254	0.051	34	0.50	0.70	250
AZT 2601		26	1x0.403	0.403	0.128	13	0.68	1.50	250
WZT 3001TF	KW 07-30 B1	30	1x0.254	0.254	0.051	40	0.56	0.80	350
WZT 3001	KW 02-30 B1	30	1x0.254	0.254	0.051	34	0.56	0.80	350
WZT 2801	KW 02-28 B1	28	1x0.320	0.320	0.081	21	0.62	1.10	350
WZT 2601	KW 02-26 B1	26	1x0.403	0.403	0.128	13	0.72	1.60	350
WZT 2401		24	1x0.510	0.510	0.205	8	0.82	2.40	250
WZT 2201		22	1x0.644	0.644	0.325	5	0.95	3.50	250
WZT 2001		20	1x0.812	0.812	0.519	3	1.10	5.40	250
WZ 3001		30	1x0.254	0.254	0.051	34	0.70	1.00	600
WZ 2801		28	1x0.320	0.320	0.081	21	0.77	1.40	600
WZ 2601		26	1x0.403	0.403	0.13	13	0.86	1.90	600
WZ 2401	KW 02-24 B1	24	1x0.510	0.510	0.20	8.5	1.05	2.90	350
WZ 2201		22	1x0.644	0.644	0.32	5.3	1.10	3.95	600
WZ 2001		20	1x0.812	0.812	0.52	3.3	1.25	5.80	600