

Category 5e SFTP Patch Cable, 26AWG×4P, PVC

Part NO. 21.15.0319

Product Specification

STANDARD COMPLIANCES:

All Category 5e Requirements as Per ANSI/TIA/EIA, ISO/IEC, and CENELEC EN Standards:

ANSI/TIA/EIA 568-B.2 Cat.5e

2nd Edition ISO/IEC 11801 Class D

IEC 61156-6,2nd Edition CENELEC EN 50288-2-2 for Patch Cable

Flame Retardancy is Verified According to IEC 60332-1.

We Implemented RoHS Compliance for the Requirement of European Union Issued Directive 2002/95/EC.

CONSTRUCTION & CHARACTERISTICS:

Conductor	Material / Size	Bare Copper / 26 AWG	
Insulation	Material	HDPE	
	Thickness	Normal Avg.: 0.22 mm	
	Diameter	Normal : 0.92 mm	
	Colors	Blue/White-Blue	Orange/White-Orange
		Green/White-Green	Brown/White-Brown
	Elongation	Min. 300%	
	Tensile Strength	Min. 1.683 Kg/mm ²	
Shield	Al-Mylar Type + Mylar Type	Insulation on outside surface	
Braid	Material / Size / Construction	Tinned Copper / Comply with international standard	
Sheath	Material	PVC	
	Thickness	Average: 0.50 mm	
	Diameter	5.6±0.3 mm	
	Color	Assorted upon request	
	Elongation	Min. 100%	
	Tensile Strength	Min. 1.407 Kg/mm ²	
	Aging at 100°C for 168Hrs	Min. elongation retention:50% Min. tensile strength retention:75%	
Marking	CAT.5E SFTP PATCH CABLE 3P VERIFIED to ISO/IEC 11801 ED.2 & TIA/EIA 568-B.2 & EN 50288-2-2 & IEC 60332-1 - 26AWGx4P TYPE CM (UL) c(UL) E164469		
	or as customer request.		
Flame Test	Burning five times, every time is less than 60 seconds and paper flag can't be burned.		

Category 5e SFTP Patch Cable, 26AWG×4P, PVC

Part NO. **21.15.0319**

APPROVALS:

- UL/cUL Listed
- 3P Certified ANSI/TIA/EIA-568-B.2 Category 5E testing performance requirements.

APPLICATIONS:

- 1000BASE-T Gigabit Ethernet
- 10BASE-T, 100BASE-T Fast Ethernet (IEEE 802.3)
- 100 VG - AnyLAN(IEEE802.12), 155/622 Mbps ATM
- 550MHz Broadband Video
- Voice, T1, ISDN

ELECTRICAL PERFORMANCES:

Spark Test		2000 ± 250 V ac		
Dielectric Strength		2500 V dc / 3 seconds		
Insulation Resistance Test		Min. 150 MΩ/Km		
Conductor Resistance		Max. 14.07Ω/100m at 20°C		
Resistance Unbalance		Max. 5%		
Capacitance Unbalance		Max. 330 pF/100m		
Mutual Capacitance		Max. 5600 pF/100m		
Impedance	722kHz	102Ω ± 15%		
	1~125MHz	100Ω ± 15%		
Attenuation & Near End Cross Talk	Frequency (MHz)	Attenuation (dB/100M), Max	Next (dB), Min	Power Sum (dB), Min
	722kHz	--	67.0*	64.0*
	1MHz	--	65.0*	62.0*
	4 MHz	6.4*	56.0*	53.0*
	8 MHz	8.9*	51.0*	48.0*
	10 MHz	9.9*	50.0*	47.0*
	16 MHz	12.3*	47.0*	44.0*
	20 MHz	13.8*	45.0*	42.0*
	25 MHz	16.0*	44.0*	41.0*
	31.25 MHz	17.1*	42.0*	39.0*
	62.5 MHz	25.6*	38.0*	35.0*
	100 MHz	33.0*	35.0*	32.0*
125 MHz	37.4*	34.0*	31.0*	

Category 5e SFTP Patch Cable, 26AWG×4P, PVC


Part NO. 21.15.0319

The asterisked (*) value are for information only. The minimum Next coupling loss for any pair combination at room temperature is to be greater than the value determined using the formula :

$$\text{NEXT}(f \text{ MHZ}) \geq \text{NEXT}(0.772) - 15 \text{LOG}_{10}(f \text{ MHZ}/0.772)$$

CONFIGURATION:

orange 2	green 3
white/orange	white/green
blue 1	brown 4
white/blue	white/brown

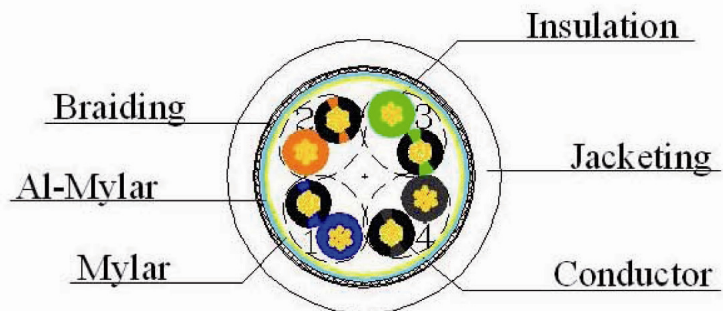

ORDERING INFORMATION:

Part NO. 21.15.0319

Description. Category 5e SFTP Patch Cable, 26AWG×4P, PVC(100)

Others: Available on Requests.

*Although Manifactor has taken precautions to ensure the accuracy of the product specifications at the time of publication, however, we cannot be responsible for the errors, omissions, or changes due to obsolescence. All data contained herein is subject to change without notice.

Subject to change without prior notice.