


Pin Assignment

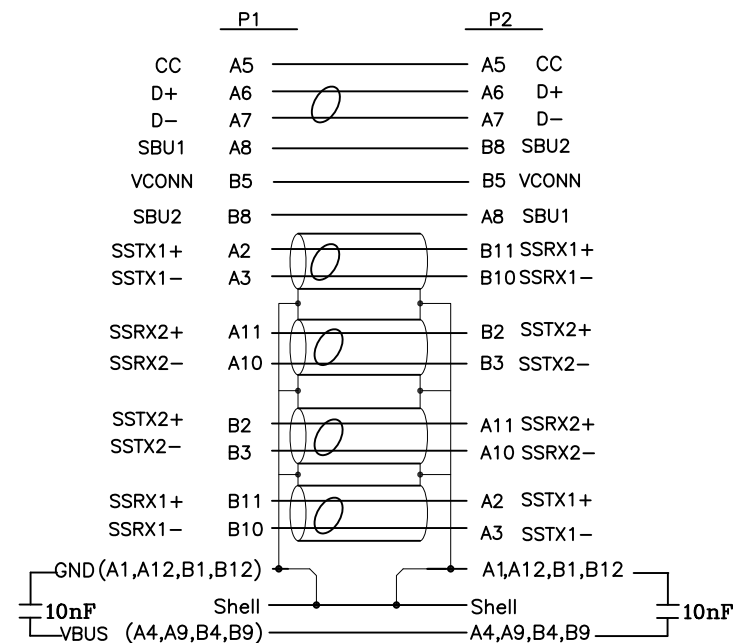

Electrical Test:

1. 100% Test(Open ,short ,miss wire)
2. Contact Resistance: 3 ohm max.
3. Speed 500MB/S

7	Type C Metal DOWN Cap	2	pcs							
6	Type C Metal UP Cap	2	pcs		TOLERANCE INCHES M/M					
5	Outside Molding:45P PVC Color:Black	17	g	.X	.015	.30				
4	Inside Molding:Polyamide Resin	1.0	g	.XX	.010	.10	TITLE: ROLINE USB3.1 Cable, PD 20V5A, C-C, M/M, 0.5m Black			
3	USB3.1 Type C Connector Shell Nickel Plated With PCB+SMT	1	pcs	.XXX	.005	.05				
2	USB3.1 Type C Connector Shell Nickel Plated With PCB+SMT~EMARK	1	pcs	DRAWN BY	QJL		Item No.:		11.02.9052	
1	USB3.1~[30AWG(7/0.105TC)+EAM]*4P+[32AWG(7/0.08TC)+AM]*1P+34AWG(7/0.06TC)*1C+26AWG(19/0.10TC)*2C+[34AWG(7/0.06TC)+A]*3C+A2EB(24/11/0.06TC 90%)OD:5.2MM~PVC Black Marking:E342987 兄 AWM STYLE 2725 80℃ 30V VW-1	AR	m	CHECK BY			SCALE	NONE	DRAWING NO.:	REV A01
						UNIT	MM			
						DATE	2018.06.25			
NO	DESCRIPTION	Q'TY	UNIT	APPD BY						1/1