


RoHS-COMPLIANT

LTR	REV.	DESCRIPTION	DATE
1*2	B	ECR # 110829-7 EDIT CABLE SPEC, TITLE	08/29/11'

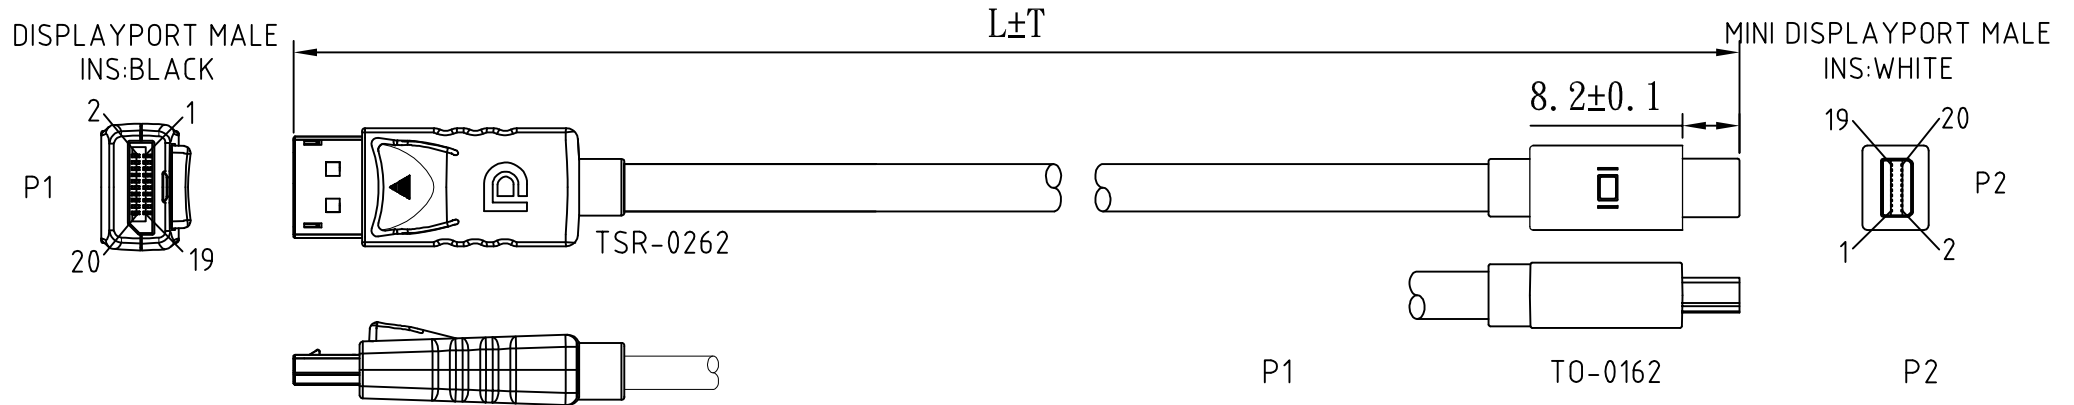

NOTE:

1.CABLE:UL20276 [32(7/0.08T.C)×1P INS:FOAM-SKIN-PE+D.W(7/0.08T.C)

+Free-edge-al-foil/Mylar]×5C+ #32(7/0.08T.C)×5C INS: PP+AL/MY
+B.D(85%)PVC JACKET; OD:5.5±0.2mm COLOR:BLACK(NK-K01).

2.CONNECTOR:

P1:DISPLAYPORT 20P MALE W/PCB CONTACT:15u",SHELL:NI-PLATED.

P2:MINI DISPLAYPORT 20P MALE CONTACT:15u",SHELL:NI-PLATED.

3.SHIELD: P1:INNER MOLD MUST BE WRAPPED COPPER TO

CONNECTOR SHELL & CABLE BRAID

P2:COPPER-FOIL 360° SOLDERED TO CONNECTOR

SHELL & CABLE BRAID

4.HOOD:P1:ASS'Y TYPE, COLOR:BLACK(NK-K01)

P2:MOLDED TYPE, PVC 45P, COLOR:BLACK(NK-K01)


5.ELECTRICAL TEST:

<1>100% OPEN SHORT & MIS WIRE TEST.

<2>CONTACT RESISTANCE 3 Ohms MAX.

<3>INSULATION RESISTANCE 10M Ohms MIN.

6.PACKING: EACH PC / POLYBAG+BIG HEADER CARD+BAR CODE LABEL.

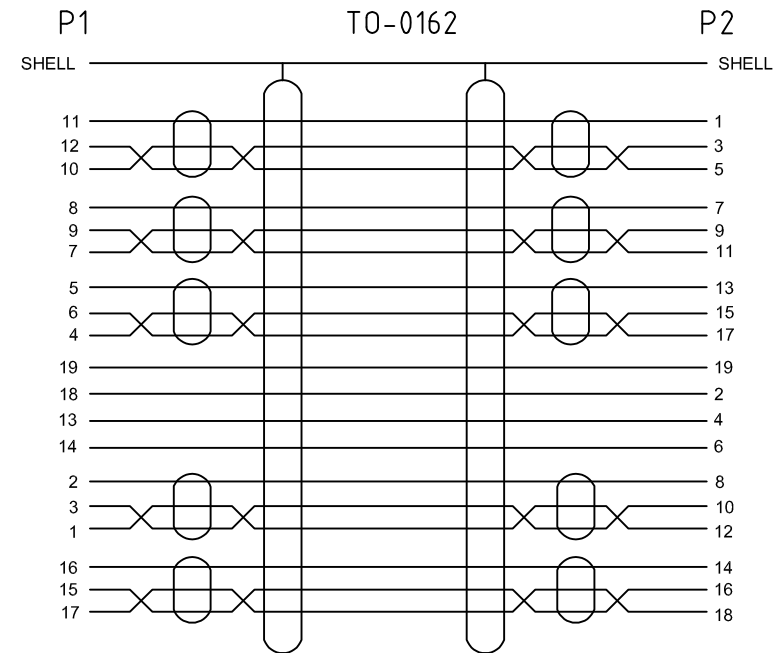

Tolerance Inch M/M		
.X	.015	.30
.XX	.010	.10
.XXX	.005	.05

Draw
FANNIE 08/29/11'

Chek

Engr

Rotronic Co., LTD.

Title
DisplayPort - Mini DisplayPort CABLE(V1.2)

Customer P/N

App'd Customer: T-RAG

Scale NONE Units M/M Third Angle Projection

Dwg No. 200-1447 REV:B Sheet.1/1

200-1447-3	11.04.5637-10	5000	50	10	20
200-1447-2	11.04.5636-20	3000	30	20	40
200-1447-1	11.04.5635-20	2000	30	20	40
DWG	P/N	L (mm)	T (mm)	PCS/INNER CARTON	PCS/CARTON