

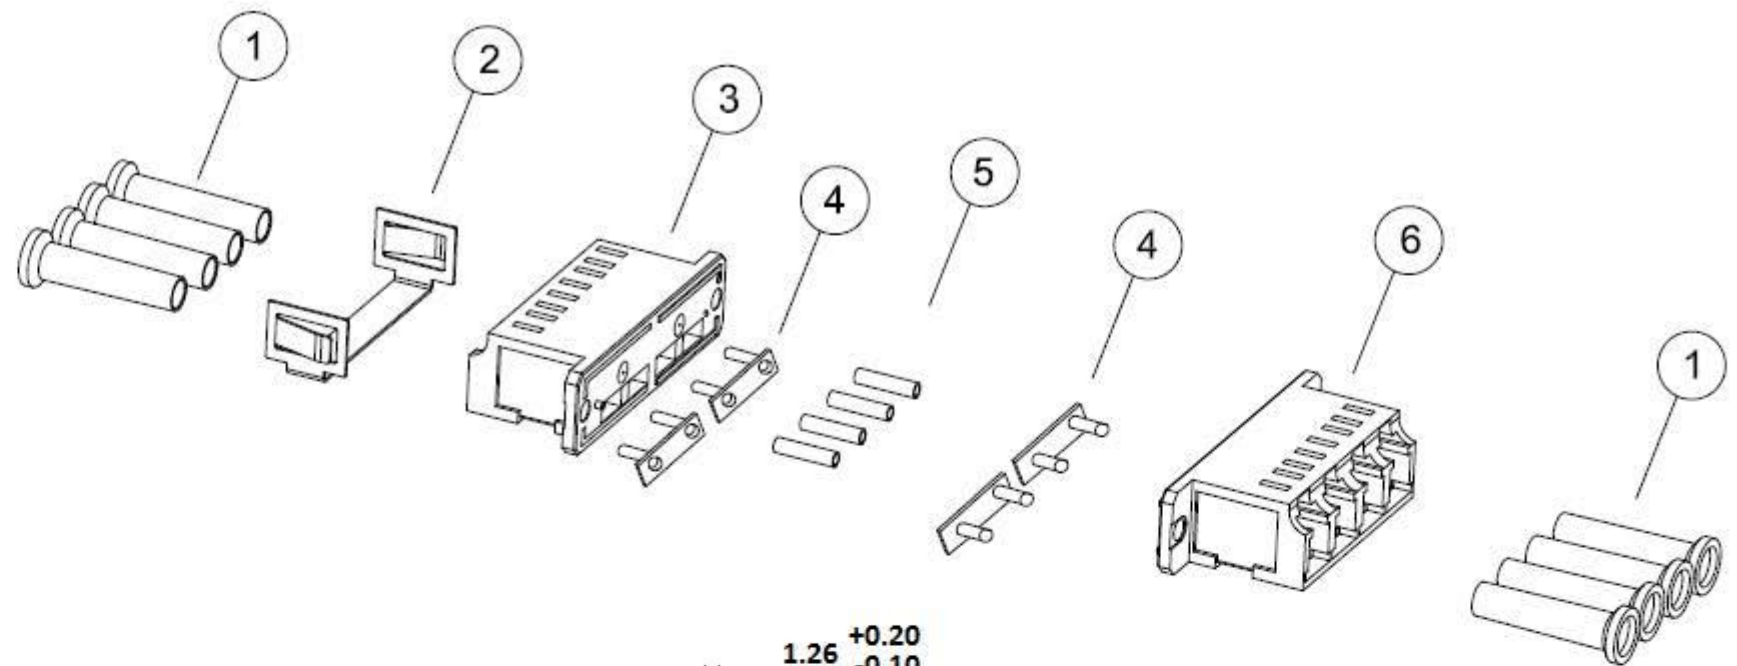




NOTE:

Insertion Loss (typical) (dB)	≤ 0.12
Insertion Loos (dB)	≤ 0.20
Operating Temperature (°C)	-40 ~ +80
Storage Temperature (°C)	-40 ~ +85

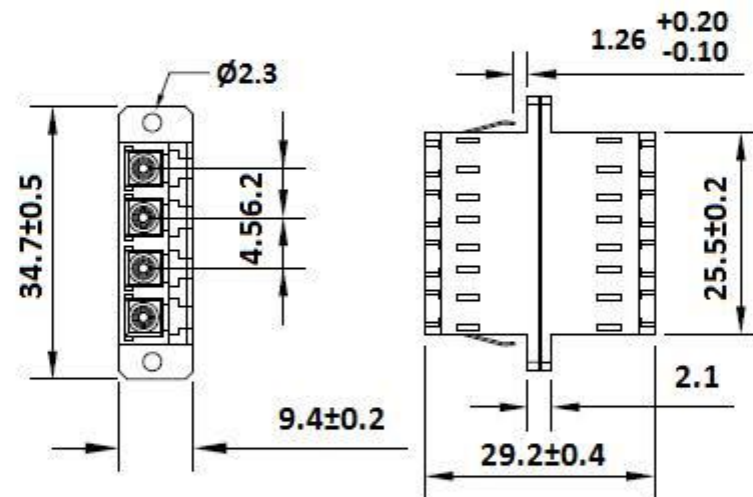

MATERIAL LIST:

⑥	LC Body Quad Lime Green (SC Duplex footprint)	1pcs			
⑤	LC Sleeve ceramic (Multi-Mode)	4pcs			
④	Bush Lime Green	4pcs			
③	LC Body Quad Lime Green (SC Duplex footprint)	1pcs		Item No.	21.17.0050
②	Metal Mount	1pcs		Desc.	ROLINE Adaptor, LC Quad with Flange, OM5 Lime Green
①	LC White Dustcap	8pcs			
NO.	SPECIFICATION STANDARD	QT' Y	REMARK		
		NEW	2018-2-9	A	
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.	