


RoHS Compliant

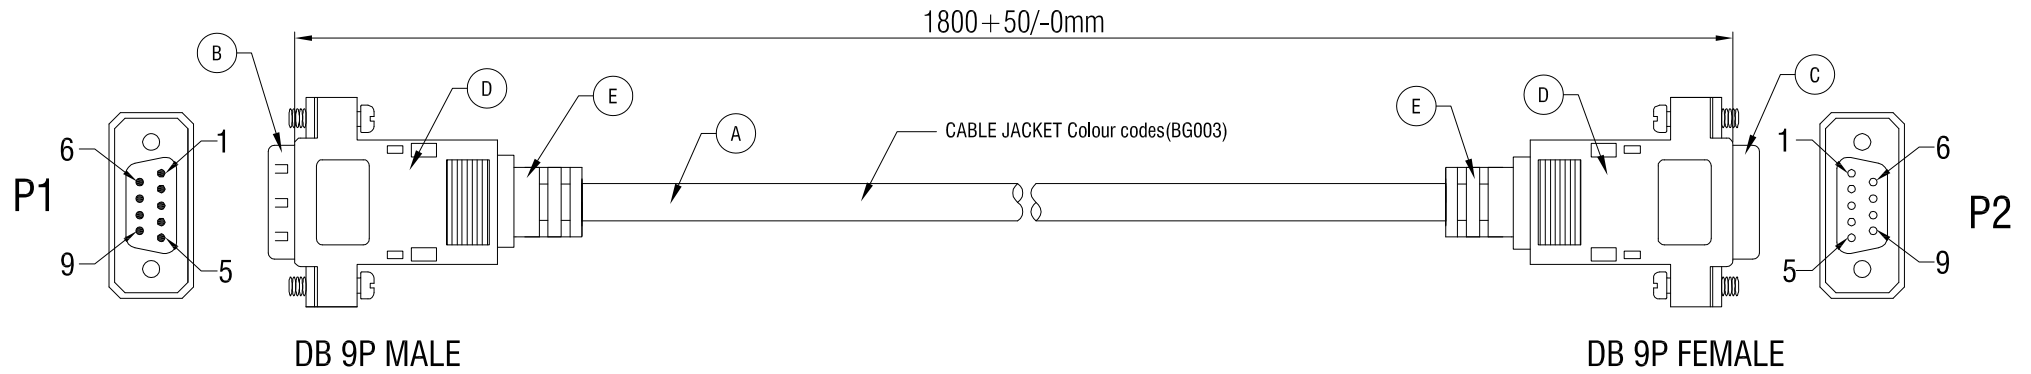

WIRE ADDRESS

P1	P2
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
SHELL	SHELL

Electrical Test:
1.100% TEST OPEN SHORT MIS-WIRE.
2.CONTACT RESISTANCE:3Ω MAX.
3.INSULATION RESISTANCE:5 MΩ MIN.
4.HI-POT:300V DC/10MS.

					VALUE RS-232 cable DB9 M/F assembled, 1.8m									
E	45P PVC BEIGE(BG003)					G								
D	DB9P Assembly shell BEIGE(BG003)+INCH Short Screw				2	PCS	Item				11.99.6218			
C	DB9P FEMALE(BLACK INSULATOR,SHELL Nickel Plated,PIN Gold Plated)				1	PCS	Draw				Kobe	Date: 2015.12.07		
B	DB9P MALE(BLACK INSULATOR,SHELL Nickel Plated,PIN Gold Plated)				1	PCS	Approval							
A	NON-UL 30AWG*9C + AE(BC),OD:5.0mm,BEIGE(BG003) PVC JACKET.				1	PCS								
NUMBER	PRODUCT SPECIFICATIONS				Quantity	Unit	Duty				F16	BOM.NO:XXXXXX		
1		2		4		Sample NO.		Drawings of 1 (1)		Proportion: 1:1	Unit(mm)			A4