






ELECTRICAL TEST:

1.100% Real machine test

Pin Assignment

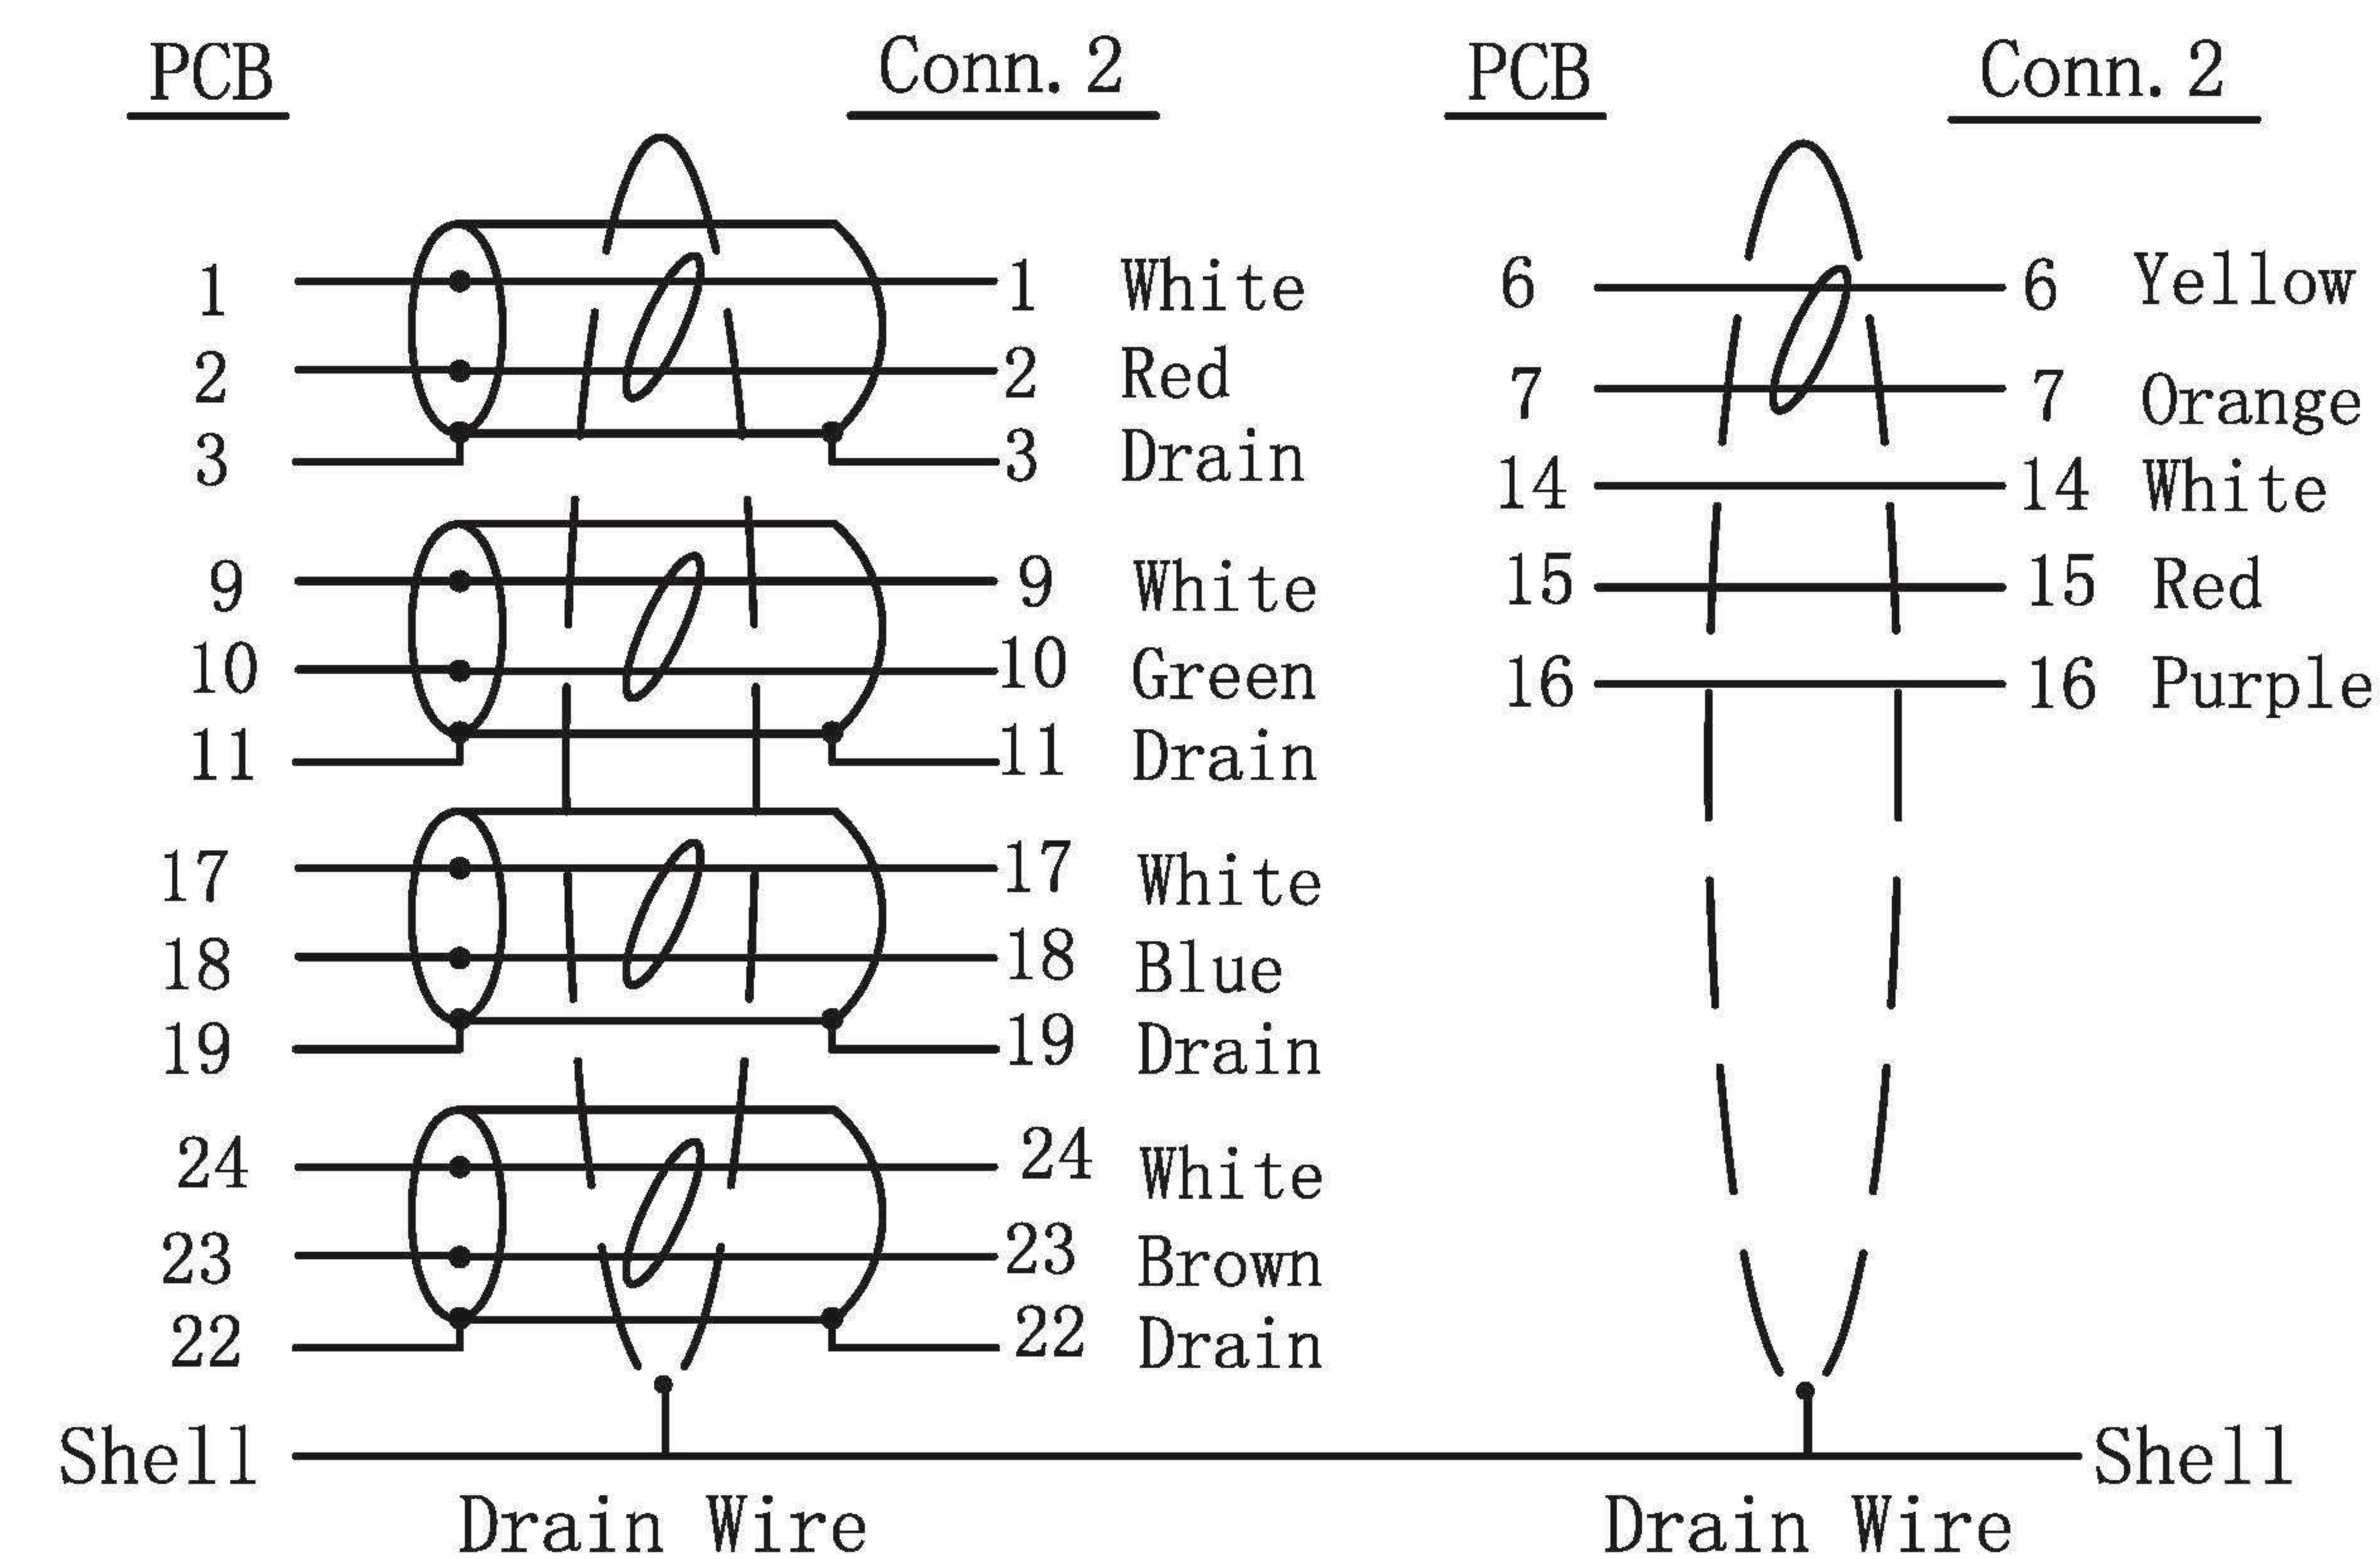

13	30P black PVC	AR	g
12	#4-40UNC 2.8*58.25MM Nickel Plated	2	pcs
11	DVI M Transparent PVC Dust Cover	1	pcs
10	Display Port M Transparent PVC Dust Cover	1	pcs
9	Black Heat Shrink Tube: ϕ 2.0*8MM	0.04	m
8	Black Heat Shrink Tube: ϕ 1.5*16mm	0.016	m
7	Black Heat Shrink Tube: ϕ 1.0*7mm	0.035	m
6	45P black w/LOSH	AR	g
5	DVI(24+1)M Welding line iron shell nickel plating black rubber core	1	pcs
4	Display Port M Nickel Plated Back Shell	1	pcs
3	Display Port M Nickel Plated Front Shell	1	pcs
2	DisplayPort Port M PIN PIN Gold Plated With PCB	1	pcs
1	UL20276 (30AWG*1PR+EAM)*4+30AWG*1PR+30AWG*3C+AEB(16*7/0.12)AL OD 5.5MM BLACK w/LOSH	1.0	m
NO	DESCRIPTION	Q'TY	UNIT

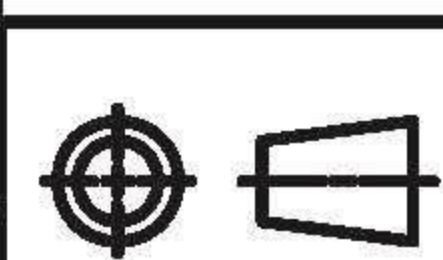		TOLERANCE		VALUE DisplayPort Cable, DP-DVI, M/M, 1m, LSOH			
		INCHES	M/M				
.X		.015	.30				
.XX		.010	.10				
.XXX		.005	.05				
DRAWN BY				Item No.		11.99.5614	
CHECK BY				SCALE	NONE	DRAWING NO.:	REV.
				UNIT	MM		A01
APPD BY				DATE	15.07.17		1/1