

更改 REV	出图日期 DATE	设变内容 MODIFICATION	修 改 DRAWN
	04/05/09		

SPECIFICATIONS

1. ELECTRICAL:






UL APPLICATIONS: 250 VOLTS AC MAX., AT 2 AMPS.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VOLTS AC.
INSULATION RESISTANCE: 100 M Ω .
TERMINATION: RESISTANCE 20m Ω MAX AFTER ENVIRONMENTAL TESTING.






2. MECHANICAL:

CABLE-TO-PLUG TENSILE STRENGTH: 20 POUND MIN.
DURABILITY: 200 MATING CYCLES.

3. MATERIAL & FINISH:

HOUSING: POLYCARBONATE, UL94V-0 OR UL94V-2.
COLOR: TRANSPARENT OR OTHER COLOR ARE AVAILABLE.
CONTACT BLADE: COPPER ALLOY.
CONDUCTOR: STRANDED & SOLID WIRE, 24AWG, 26 AWG.
GOLD PLATING: 3u"~50u", ARE AVAILABLE.

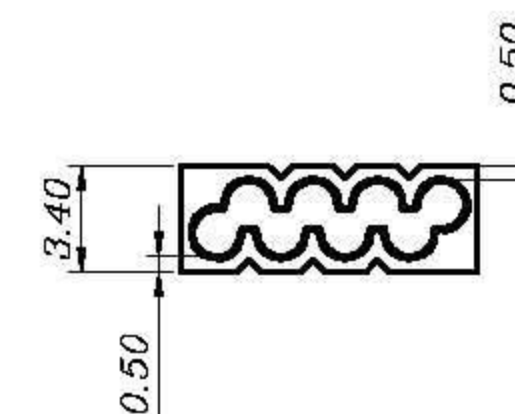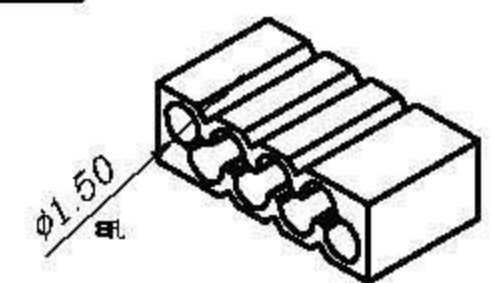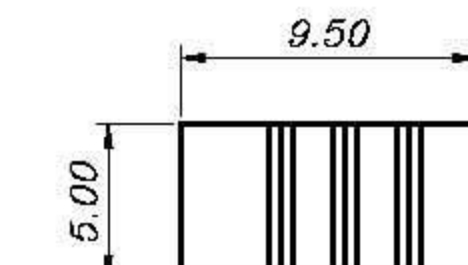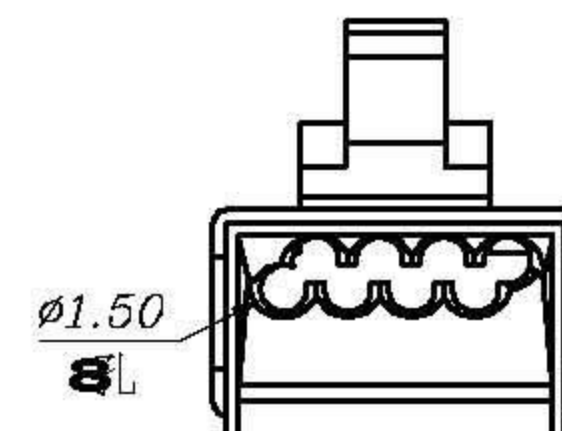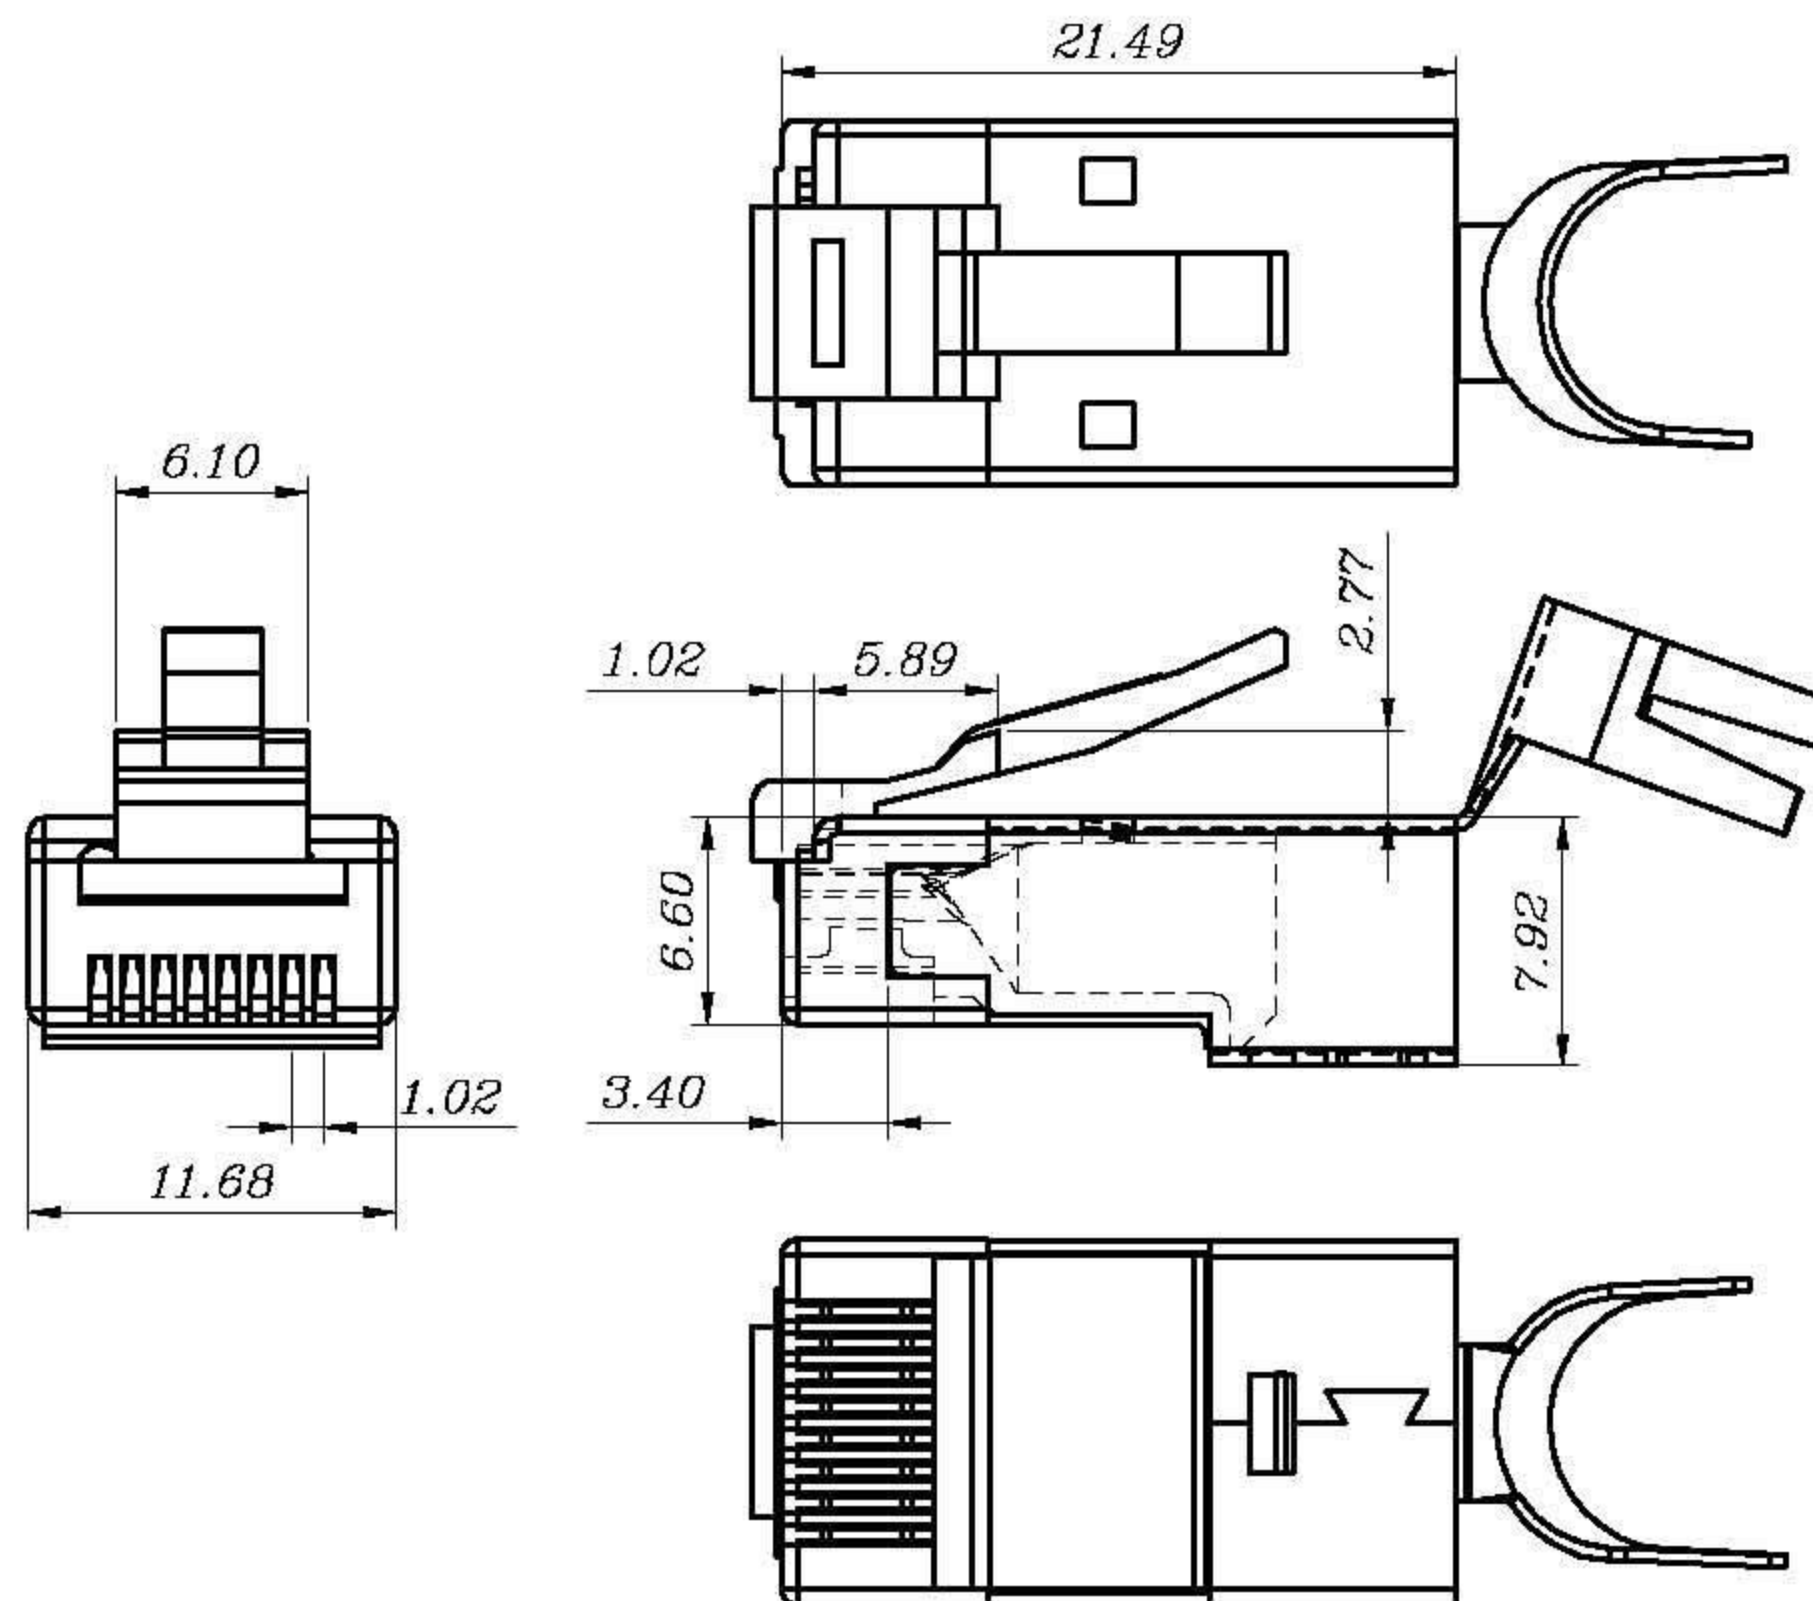

BLADE:	E	Y	Z	A	YL	ZL
Drawing						
Mark				✓		✓

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"	CABLE TYPE	ROUND	FLAT
Mark						✓	Mark	✓	

ROTRONIC CO., LTD.				
DIMENSION IN mm (Inch) TOLERANCE UNLESS OTHERWISE SPECIFIED		Material: PC	Item no.: 21.17.3063	
.X±0.20	.X°±5°	ROLINE Cat. 6 Modular Plug, STP, for Solid		
.XX±0.10	.XX°±2°			
审 核 APPROVAL	核 对 CHECKED	制 图 DRAWN	比例 SCALE	张数 SHEET
沈红波	钟均江	LiWenjuan	2/1	1/1
			角法 PROJ.	更改 REV
				A

ST-DR-009A