


Length (see below list)

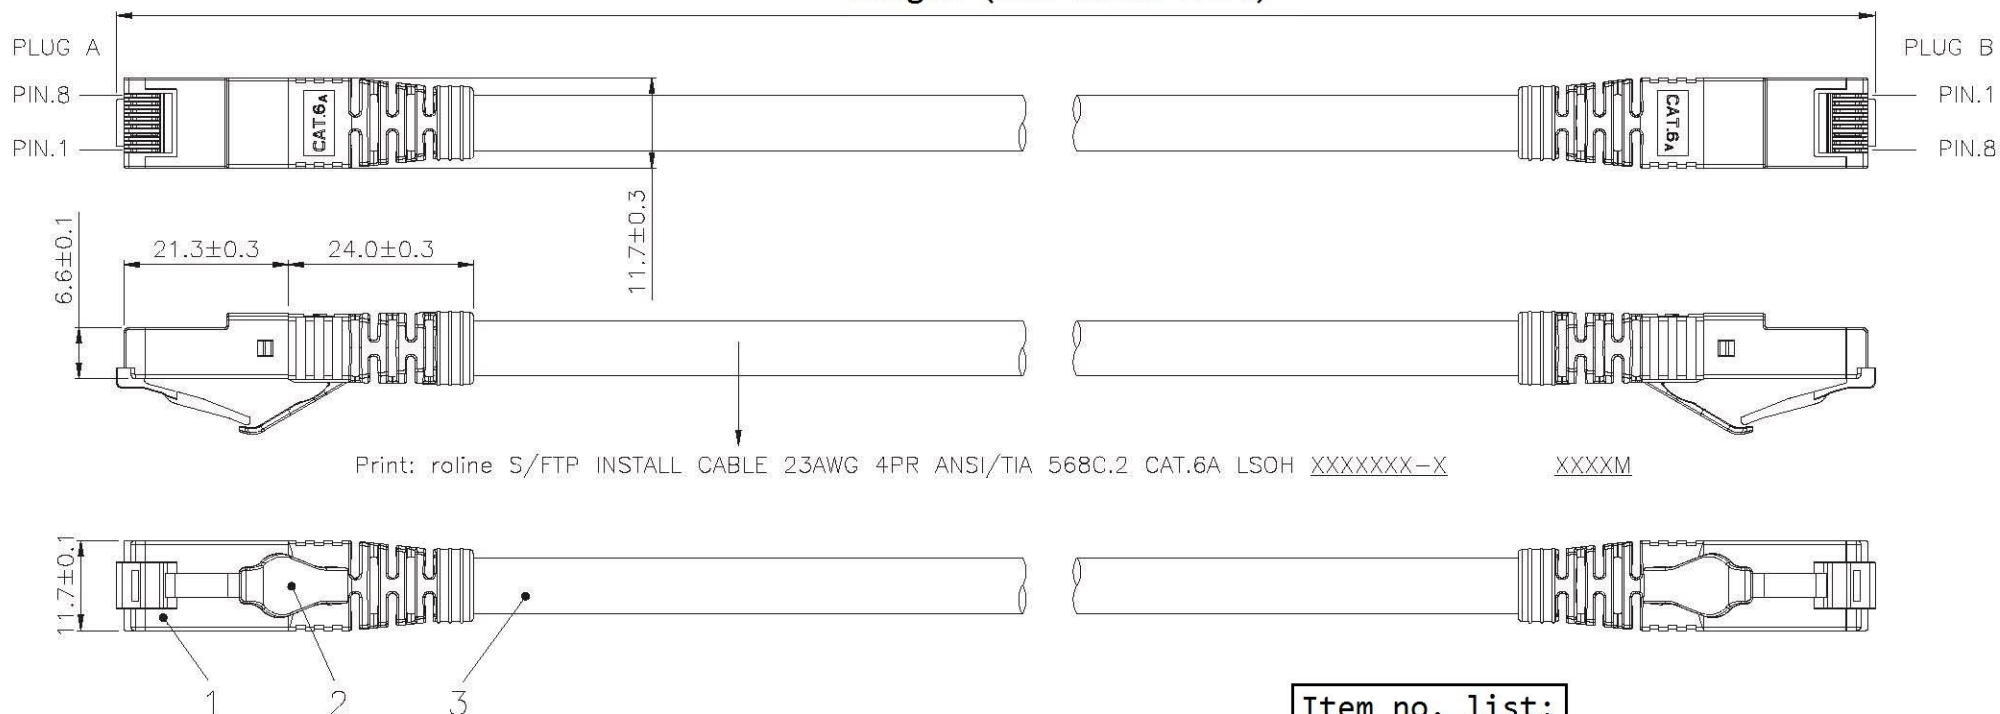


Specification :

Material :

1. RJ45 Plug :
 - 1-1. Housing : Polycarbonate, UL 94V-2, Blue color
 - 1-2. Contact finished : Min. 50 micro-inch Gold plating over min. 50 micro-inch Nickel plating on surface contact area
 - 1-3. Contact material : Phosphor Bronze
 - 1-4. Shield : Zinc Alloy with Nickel plated
2. SR : PC 2250 UL 94V-2
3. Cable : 23AWG Solid wire, wiring:T568B
 - 3-1. Jacket : LSOH, Gray(RAL7035)
 - 3-2. Conductor : 23 AWG Solid copper
 - 3-3. Isolation : Foam PE
 - 3-4. Shield : Aluminum Foil
 - 3-5. Cable structure : S/FTP, 4 twisted pair
4. Minimum of the bending radius: 50mm

Item no. list:

21.15.0874	20m	21.15.0878	70m
21.15.0876	30m	21.15.0879	90m
21.15.0877	50m		

Item no.		21.15.0874, 21.15.0876, 21.15.0877, 21.15.0878, 21.15.0879					
Description		ROLINE Cat. 6a S/FTP Patch Cord, Solid, LSOH, grey					
"##": Matching DIM. "※": Important DIM. Others General DIM.	DRAWING	03.Jul.2014		byz			
	CHECK	03.Jul.2014		Jane			
	APPROVAL	03.Jul.2014		Frank			
GENERAL TOLERANCE OF DIMENSIONS X.XXX ±0.005 X.XX ±0.05 X.X ±0.1			DATE		NAME		
	SCALE	1/1 (A4)		UNIT	mm		
			DRAWING NO.			ACBUEXX072XXXXX(SA1)	
		DRAWING CLASSIFICATION		S	SHEET	1 OF 1	

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER
1					