
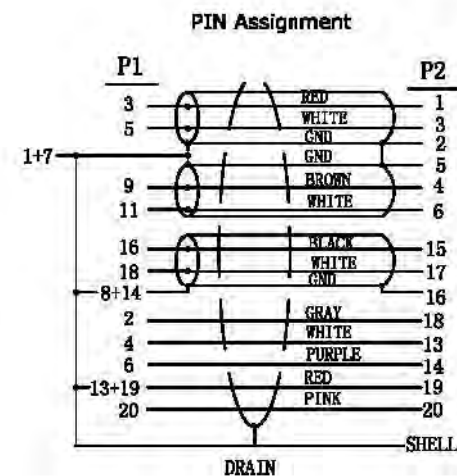


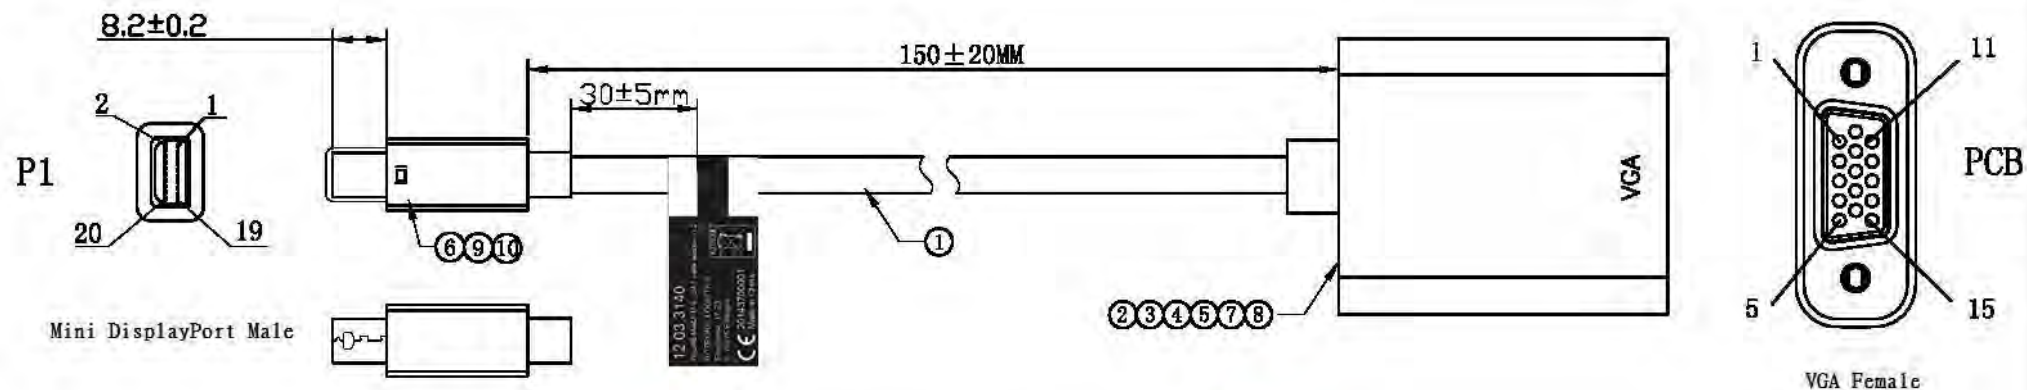

ELECTRICAL TEST:

- 1.100% OPEN SHORT & MIS WIRE TEST
- 2.CONTACT RESISTANCE:2 OHM(MAX)
- 3.INSULATION RESISTANCE:10M OHM(MIN)
- 4.HI-POT TEST:DC 300V/10ms

10	Mini DP M(miniDP/VGA F PCB) ABS One-piece SHELL Apple WHITE PRINT: □ PT:COOL GRAY 8C W:5.0MM	1	pcs
9	Mini DP M(MiniDP/VGA F PCB) ABS One-piece SHELL WHITE	1	pcs
8	#4-40UNC H4.75*8.6MM PLATED: NICKEL NUT (NUT H=4.8MM)	2	pcs
7	φ 0.8 heat shrinkable TUBE BLACK 6mm*3pcs	0.018	m
6	Mini DisplayPort M TRANSPARENT COLOR PVC DUST COVER	1	pcs
5	VGA F(MiniDP/VGA F PCB) ABS One-piece SHELL WHITE	1	pcs
4	VGA F(MiniDP/VGA F PCB) ABS One-piece SHELL WHITE print: VGA (color: COOL GRAY 8C)	1	pcs
3	65P SNOWY WHITE PVC	4	g
2	empty PCB + SMT + PLATED: NICKEL	1	pcs
1	Mini DP M to M PLATED: NICKEL SNOWY WHITE 34AWG AL 0.4M 3 pair twist	1/2	pcs
NO	DESCRIPTION	Q' TY	UNIT

		TOLERANCE INCHES M/M						
.X		.015	.30					
.XX		.010	.10					
.XXX		.005	.05					
ROLINE Cable Adapter, MiniDP M to VGA F white color, v1.2								
DRAWN BY		zheng		Item No.:		12.03.3140		
CHECK BY				SCALE	NONE		DRAWING NO.:	REV K
				UNIT	MM			
APPD BY				DATE	13.03.15			
								1/3