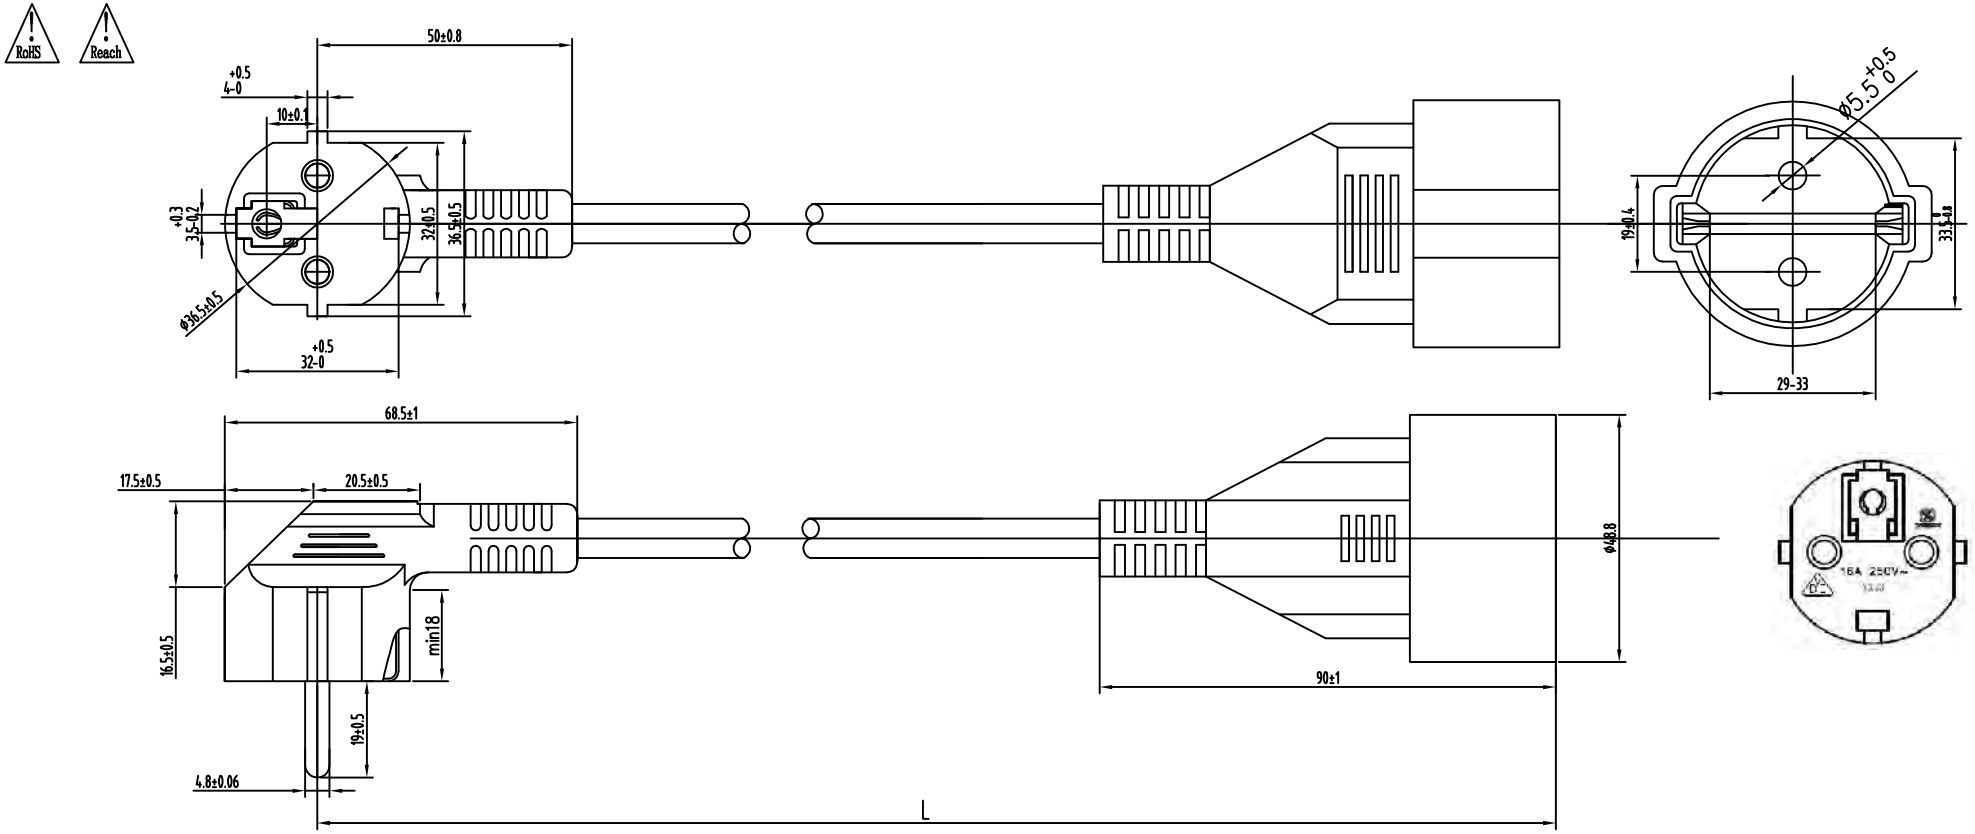

Notes;

1.Plug: 16A 250V~ Clear injuection, no scrath and dirt

2.Cable:H05VV-F 3G1.5 mm²Jacket ø8.5±0.2 Conductor48×0.20,
Core ø2.4±0.1
Cable Mark：⊲VDE⊳ H05VV-F 3G1.5mm² Ningbo Yuxin Appliance Co,.Ltd

3.Test: Hi-Pot : Inner Voltage AC2500V/1S、External Voltage AC6000V/1S、current leakage 1mA, insulation resistance no less than 50MΩ, no strike out

RoHS and REACH

Item	Customer Model	Model/No.	Length(mm)	Color
1	19.99.1168	H05VV-F 3G1.5mm2	10000±50mm	Black
1	19.99.1167	H05VV-F 3G1.5mm2	5000±25mm	Black
1	19.99.1166	H05VV-F 3G1.5mm2	3000±15mm	Black

SECOMP

P.N	NEDIS	Item	19.99.1166 /19.99.1167	Drw.N	JT-YP-0104
Dre By	Ni Shaojian		/ 19.99.1168	Date	
Check By		.x±0.15 .x'±0.15 .xx±0.25 .xx'±0.25 .xxx±0.38 .xxx'±0.38	比例 1 : 1		mm
			投影		