


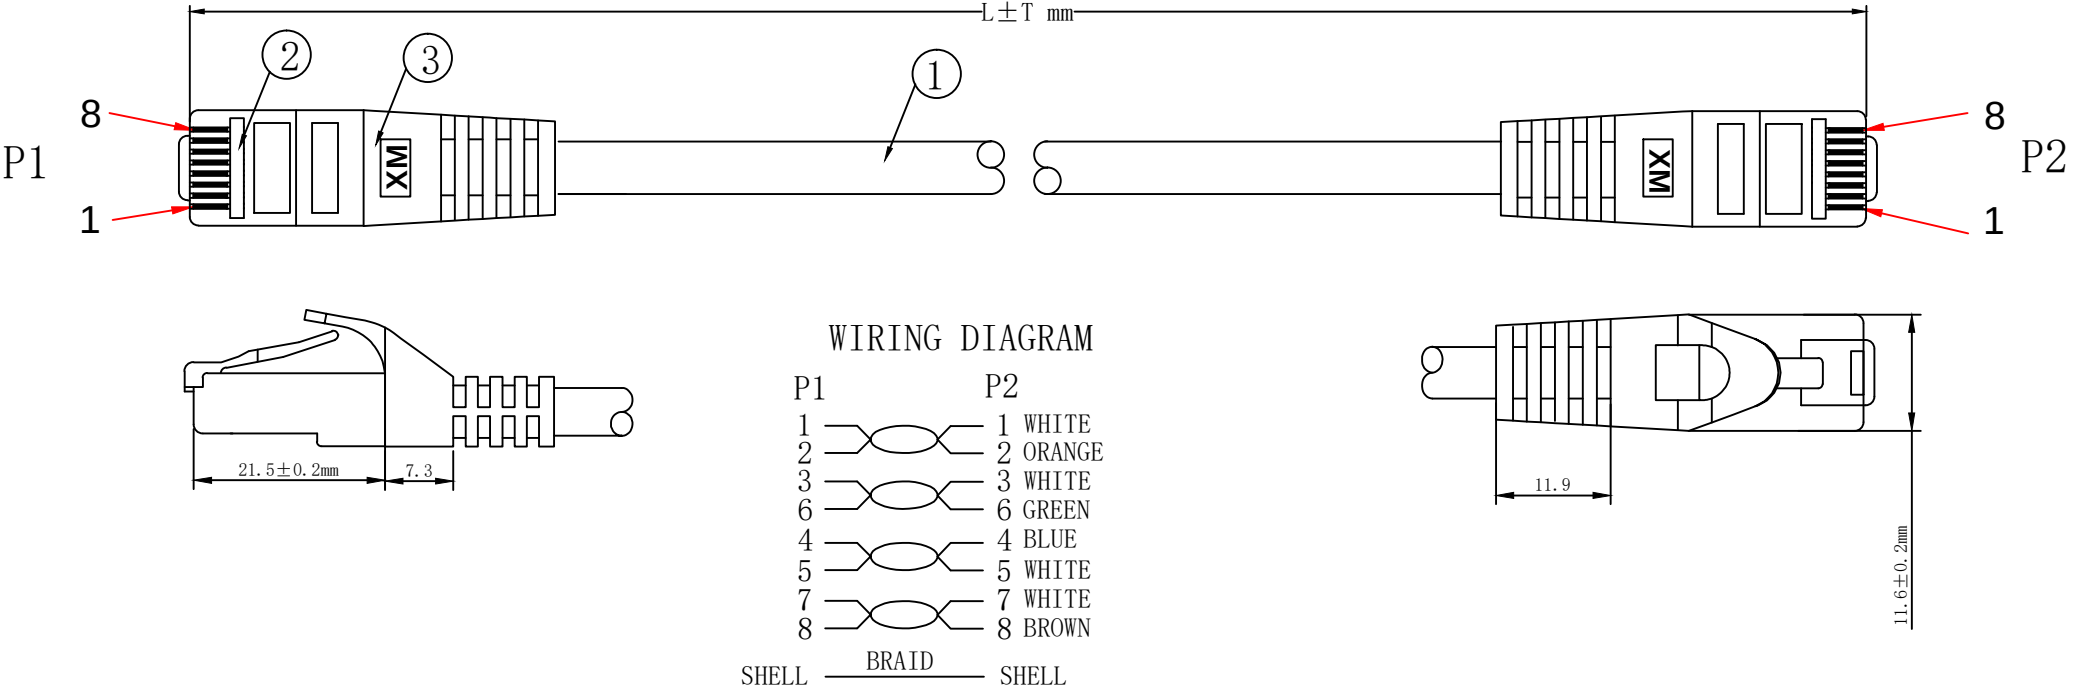

NOTE:

- 1.100% OPEN SHORT, MISS WIRE TEST
- 2.Fluke channel test:($L \leq 60$ m)
- TEST LIMIT:ISO 11801 Channel Class EA
- 3.SPRAY WORD:CAT.6A S/FTP LSZH 500MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2
- 4.ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	75A PVC	2	
②	CONNECTOR	RJ45 8P8C shielded Plug,Pin Gold Plated 3u", Transparent	2	
①	CABLE	S/FTP CAT.6A (1/26AWGBC*1P+AL-FOIL)*4PAIRS+ JACKET:LSOH/Gray(warm gray 3C) OD:6.2±0.2mm	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK
		NEW	2016-05-19	A
BY	CHK	REVISION RECORD MODIFICATION	DATE	REV.

ITEM	LENGTH
21. 99. 0844	20000±300mm
21. 99. 0846	30000±300mm
21. 99. 0847	50000±400mm
21. 99. 0848	70000±400mm
21. 99. 0849	90000±400mm
DESC.	VALUE CAT 6A S/FTP SOLID PATCH CORD, LSOH, GREY