

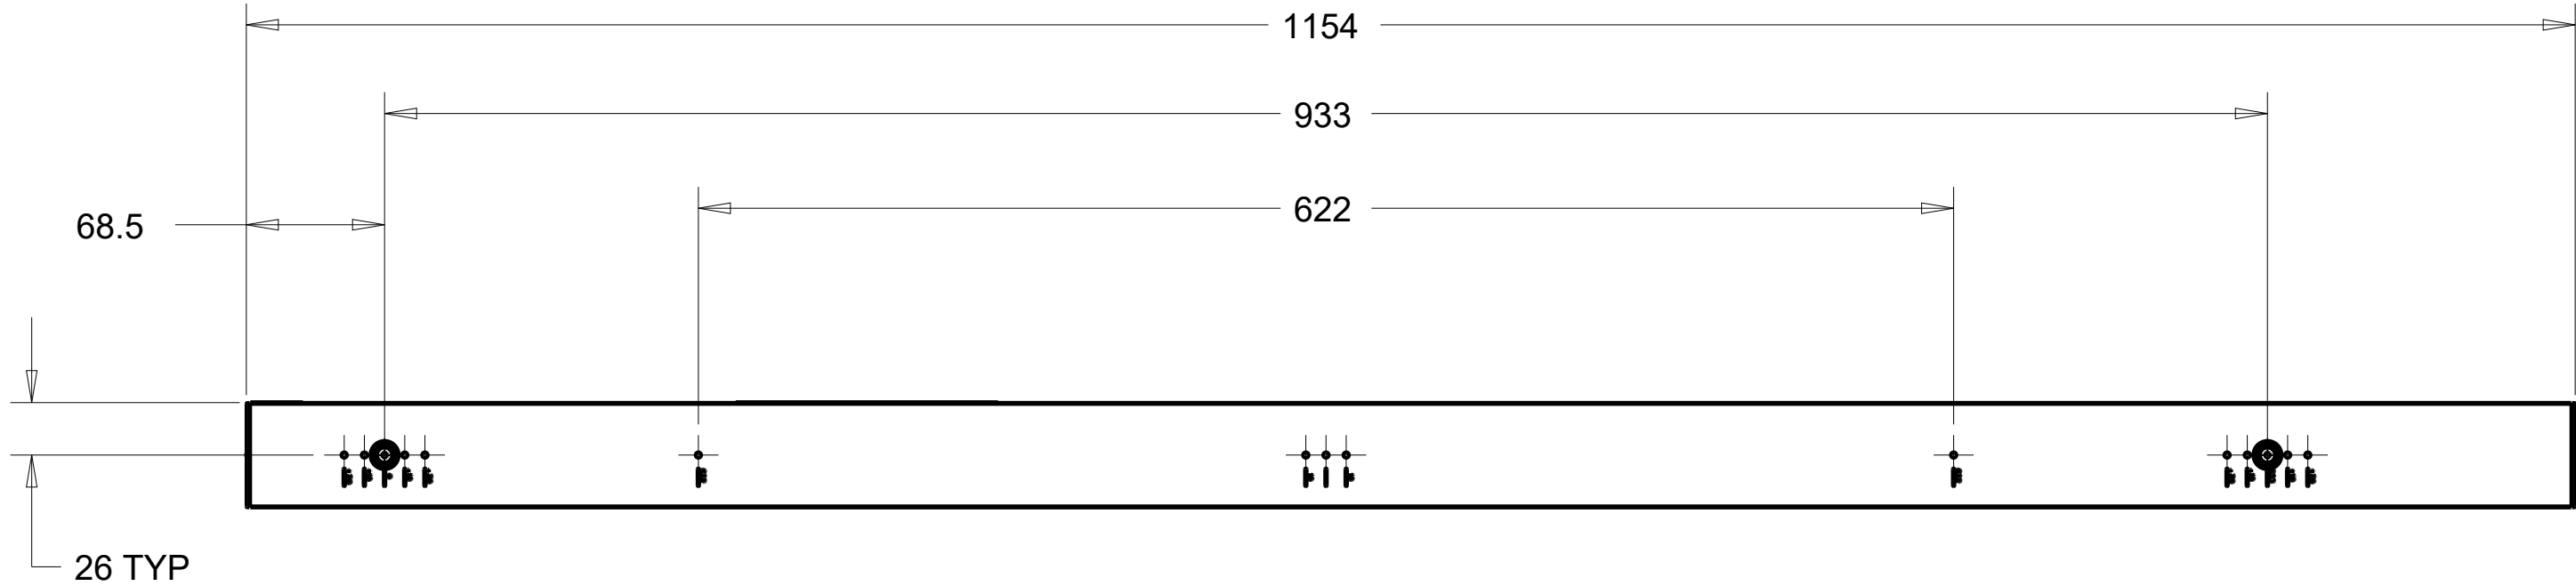
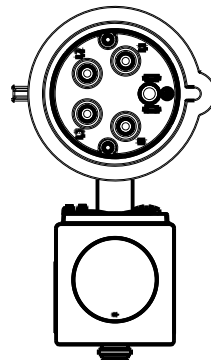
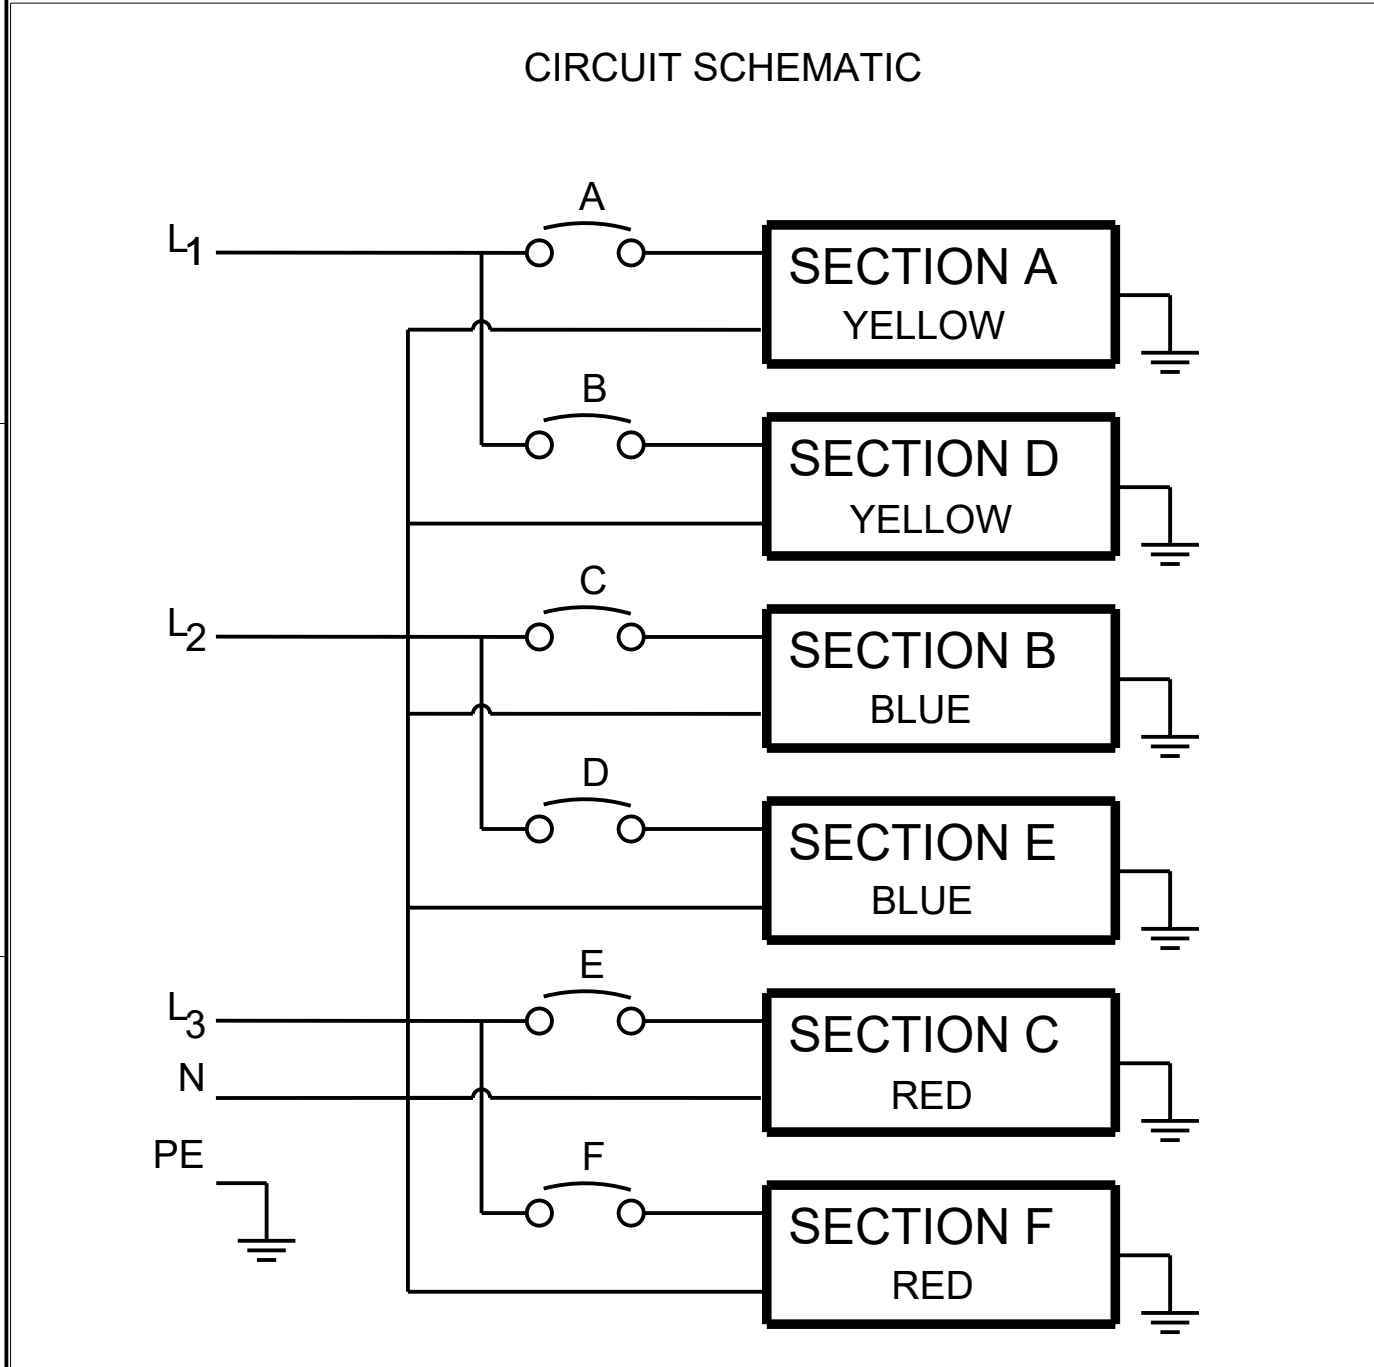


CABLE LENGTH SHOWN NOT TO SCALE

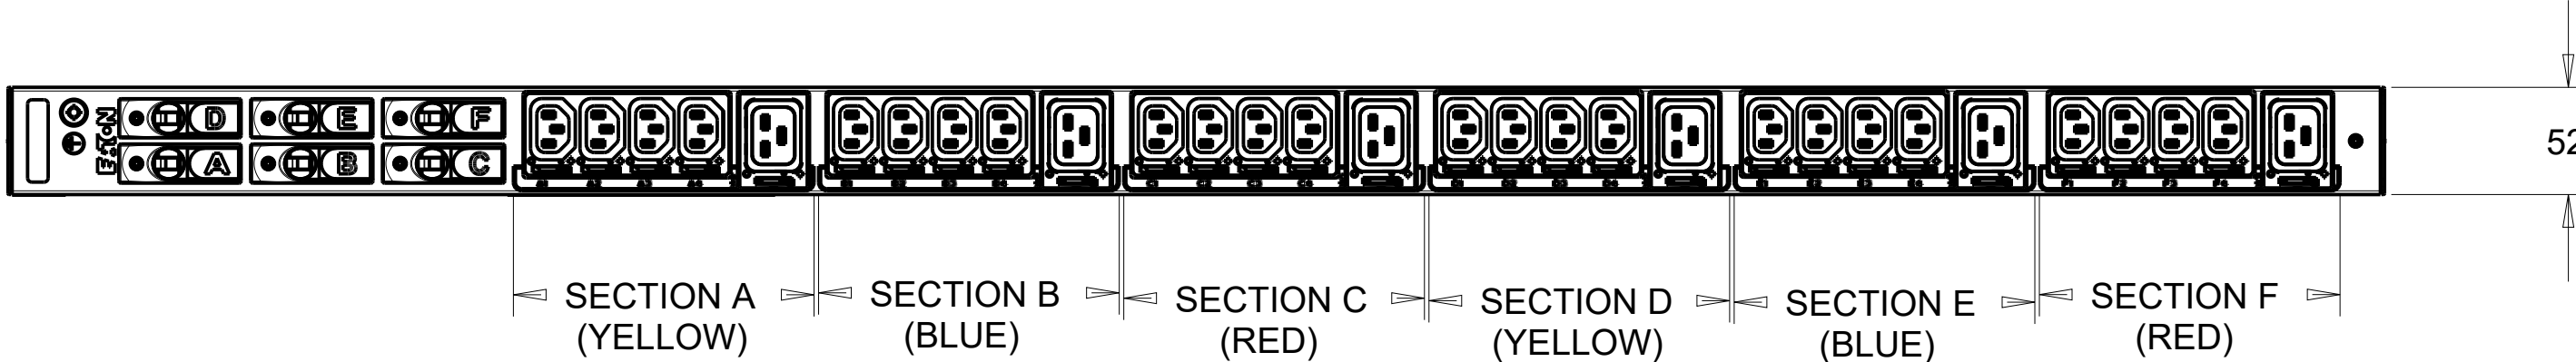

EBAB32	G3 BASIC		
FUNCTIONALITY	INPUT	OUTPUT	ENVIRONMENTAL
NONE	IEC 60309-2 32A 400V~ WYE, 3W+N+PE 4.0MM HO7 POWER CORD CABLE LENGTH: 3.0M	(24) IEC 60320 C13 GRIP (6) IEC 60320 C19 GRIP ALTERNATING SECTIONS	0 TO 60° C
MECHANICAL	INPUT RATING	OUTPUT RATING	CERTIFICATIONS
LENGTH: 1154MM WIDTH: 52 MM DEPTH: 53MM ALUMINIUM CHASSIS, BLACK MNT PATTERN SK-23919-Y1	3Ø;346-415V~; WYE, 3W+N+PE 50/60HZ 32A	200-240V~;50/60HZ 10A PER C13;16A PER C19 16A MAX PER SECTION 32A MAX TOTAL	CE, CB
CIRCUIT BREAKERS	FILTER AND SPIKE/SURGE	ACCESSORIES	CONFIGURATION
(6) 16A 1-POLE	NONE	STANDARD KSP026 - EPDU G3 EMEA VERT INSTALL PACK KA35	EBA3DH8FBJR76AM

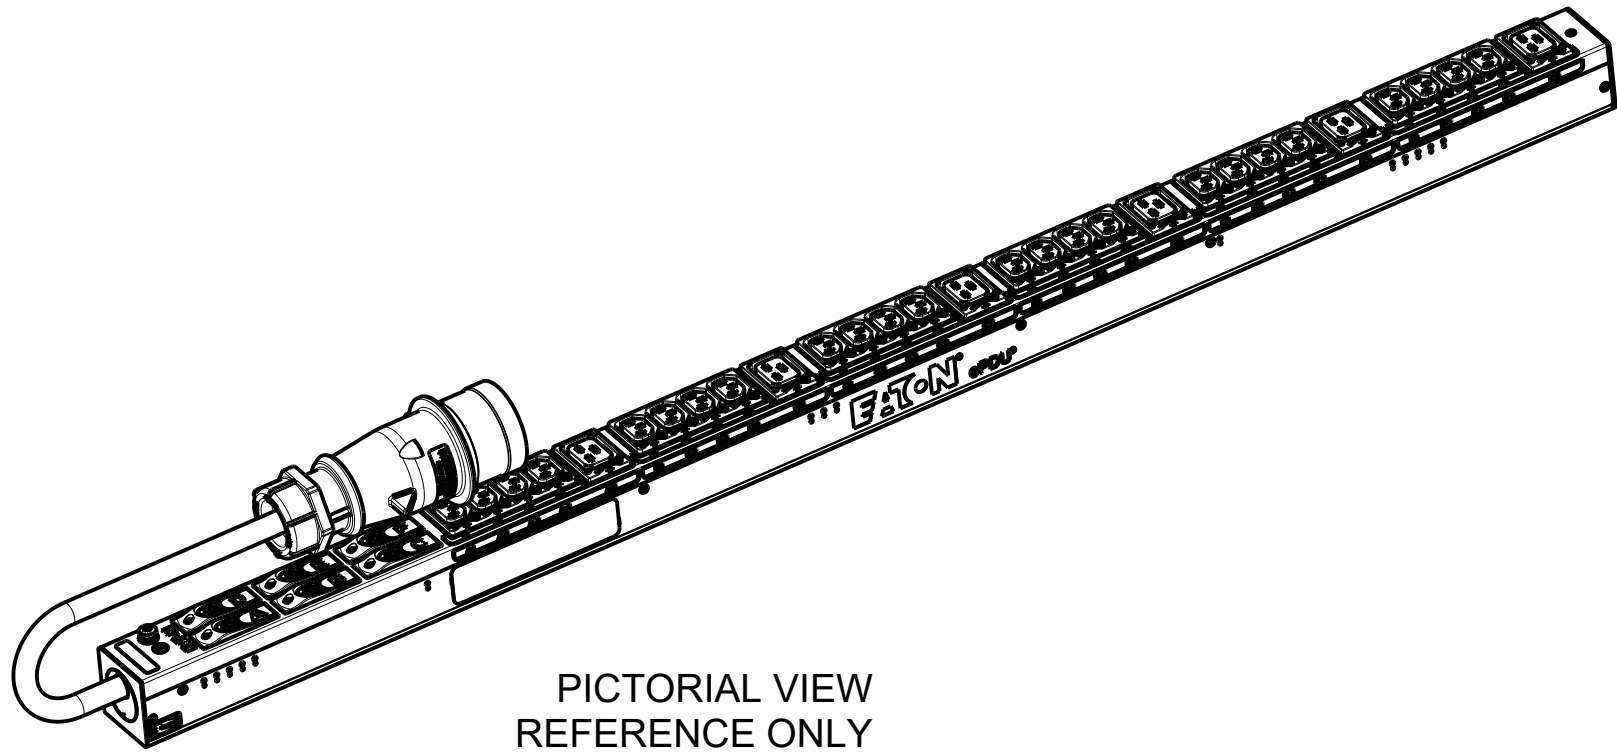

PICTORIAL VIEW
REFERENCE ONLY
SCALE 0.200

01	PRODUCT MODIFIED TO ALTERNATING SECTIONS	22.04.2019	AEK	MB
00	INITIAL RELEASE	27.04.2017	RA	MB
REV.	MODIFICATION	DATE	DESSIN/ DRAW	VERIF.
EATON		HEINEMANN PRODUCTS	VUE/VIEW EUROPE	N° MAG
		CH-1345 LE LIEU SWITZERLAND	ECHELLE / SCALE	3/10
			DESSINE LE / DRAWED THE	27.04.2017
			PAR / BY	RA
			VERIFIE PAR / VERIFIED BY	MB
TOLERANCE GENERALE / GENERAL TOLERANCE				
TRAITEMENT / FINISH		NA		
MATIERE / MATERIAL		NA		
NIVEAU DU CERTIFICAT DE SOUMISSION REQUIS / SAMPLES APPROVAL PROCESS REPORT		X	DIMENSIONS AND TOLERANCES IN MILLIMETERS	
DESIGNATION		EPDU BA 0U (309 32A 3P)24XC13:6XC19	SK-106519-Y1	01
COTES A CONTROLER		XX.XX	COTES FONCTIONNELLES	# XX.XX
INSPECTION DIMENSIONS			NUMERO DU PLAN	REV.
			PLAN NUMBER	
Ce document est propriété de Eaton Industries Manufacturing GmbH. Duplication interdite sans autorisation. This document is Eaton Industries Manufacturing GmbH property. Duplication forbidden without authorization.				