



WEIGHT	CUSTOMER NO:	REMARK
		SECOMP

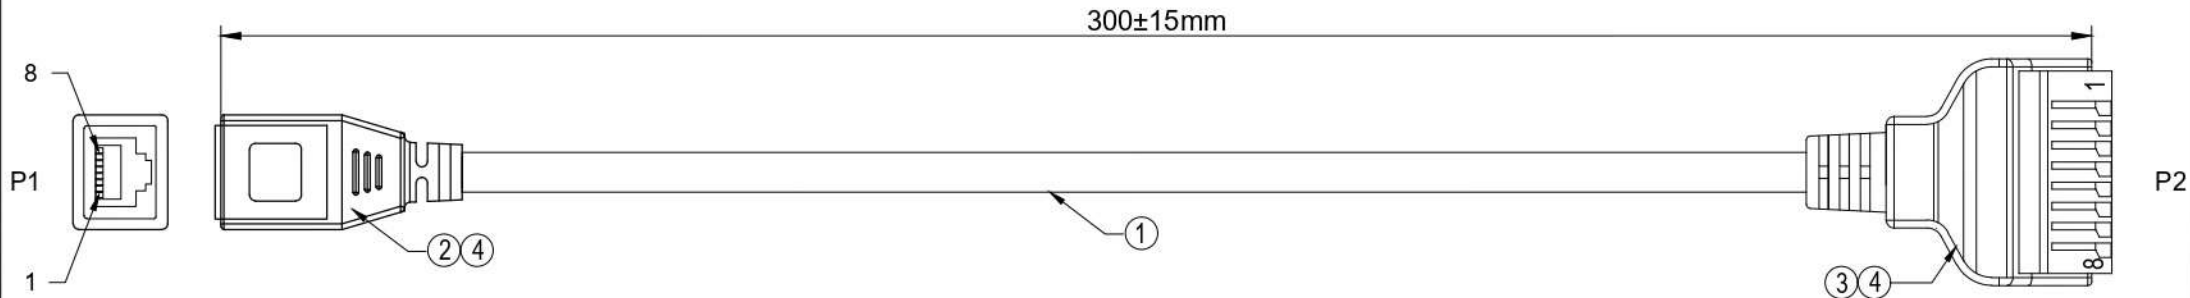

PIN ASSIGNMENT

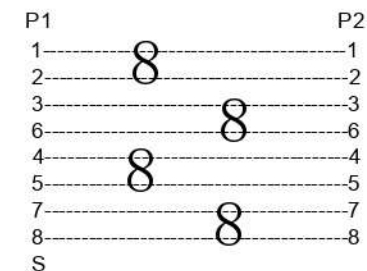

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
 - (a).100% OPEN,SHORT & MISWIRE TEST,
 - (b). INSULATOR RESISTANCE:10 Mohm MIN.
DC 300V 0.01sec.
 - (c). CONTACT RESISTANCE:3ohm MAX.

A		FIRST EDITION	BAO	2024/07/09
REV.	ECR	DESCRIPTION	C.N.	DATE
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: $\pm 1.0^\circ$		TITLE RJ45 F- 8 Position Push Button Terminal Cable Adapter		
DIMENSIONS		TOLERANCE		
0.00 TO 30.00mm		± 0.10 mm		CHKD.
30.01 TO 80.00mm		± 0.13 mm		CONF.
80.01 TO 150.00mm		± 0.15 mm		DR.
150.01mm		± 0.20 mm		BAO
MATERIAL		MODEL NO:		
MATERIAL		12.02.1172		
FINISH		SCALE	SHEET	UNIT
FINISH			1 / 1	MM
			SIZE	REV.
			A4	A

4	OVERMOLD BLACK PVC 45P MA-001.	
3	TERMINAL BLOCK GREEN 8PIN.	
2	8P8C JACK BLACK PBT WITH NICKLE PLATED SHELL.	
1	UTP CAT5E 24AWG*4P+AE OD:6.0MM L:300mm BLACK PVC JACKET.	
NO.	Description	P/N