


Item no. 26.99.0366

VALUE Cat. 6a Keystone Jack, RJ-45, STP, silver

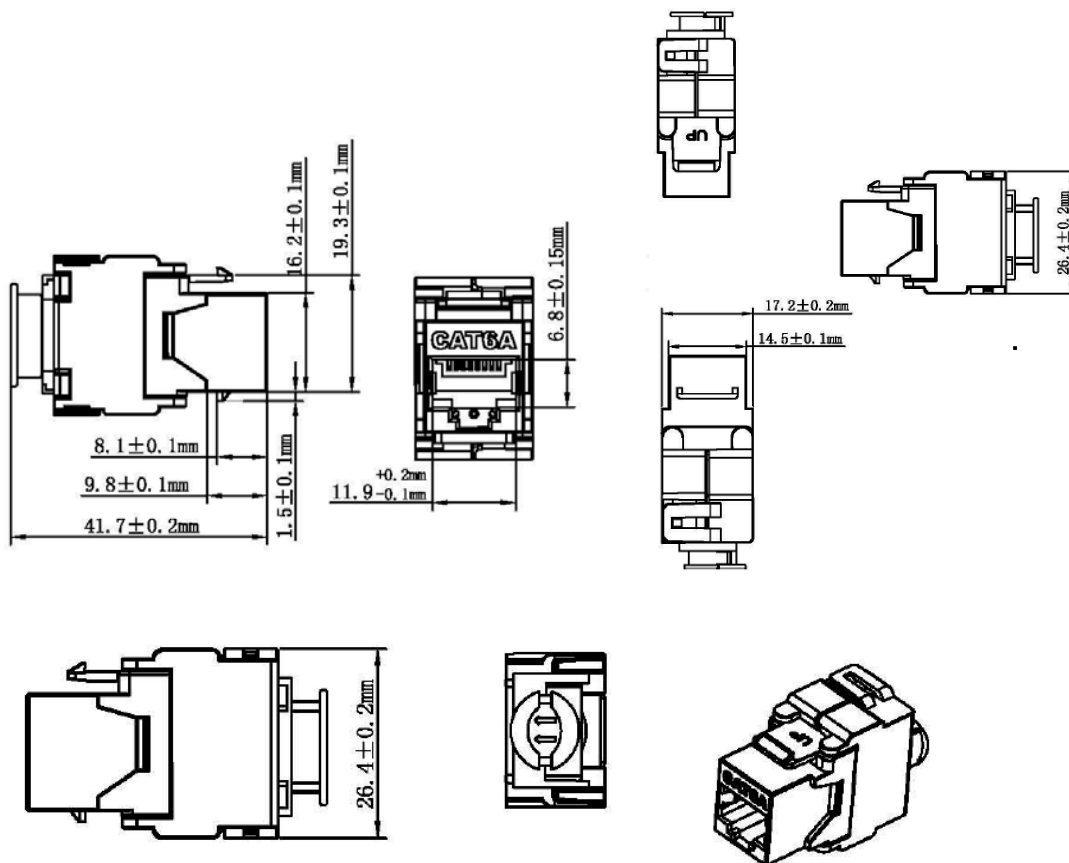

NOTES:

ELECTRICAL:

- 1.Contact Resistance : $20M\Omega$ MAX
- 2.Insulation Resistance : $500M\Omega$ MIN @ 500V DC
- 3.Withstand Voltage : DC1000V AC700V RMS 60Hz, 1MIN
- 4.CAT. 6A PERMANENT LINK : CONFORM TO ANSI/TIA/EIA 568B.2-10

ENVIRONMENTAL:

- 1.Storage : -40° TO $+70^{\circ}$
- 2.Operation : -10° to $+60^{\circ}$


MECHANICAL

- 1.SHIELD MATERIAL: ZINC ALLOY
- 2.IDC MATERIAL: PC UL94V0 TERMINAL:PHOSPHOR BRONZE, TIN PLATING
- 3.RJ45 Contact Life: 750 Times Min
- 4.IDC Life : 250 Times Min
- 5.RJ45 DIMENSION: $11.9MM \times 9.8MM$
- 6.WEIGHT: 34.7G

TYPE

- 1.SHIELDED CAT. 6A KEYSTONE JACK
- 2.COLOUR:SILVERY WHITE

PACKING: 1PCS/PE BAG +EAN



Material List:

⑦	MODULAR COVER	FIREPROOF PC UL94V0	1	
⑥	RJ 45 JACK INSERT	8P8C 3U" GOLD PLATED	8	
⑤	PCB	1.6mm UL 94V0	1	
④	IDC BODY	FIREPROOF/PC UL 94V0	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 22-26AWG CABLE	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK