


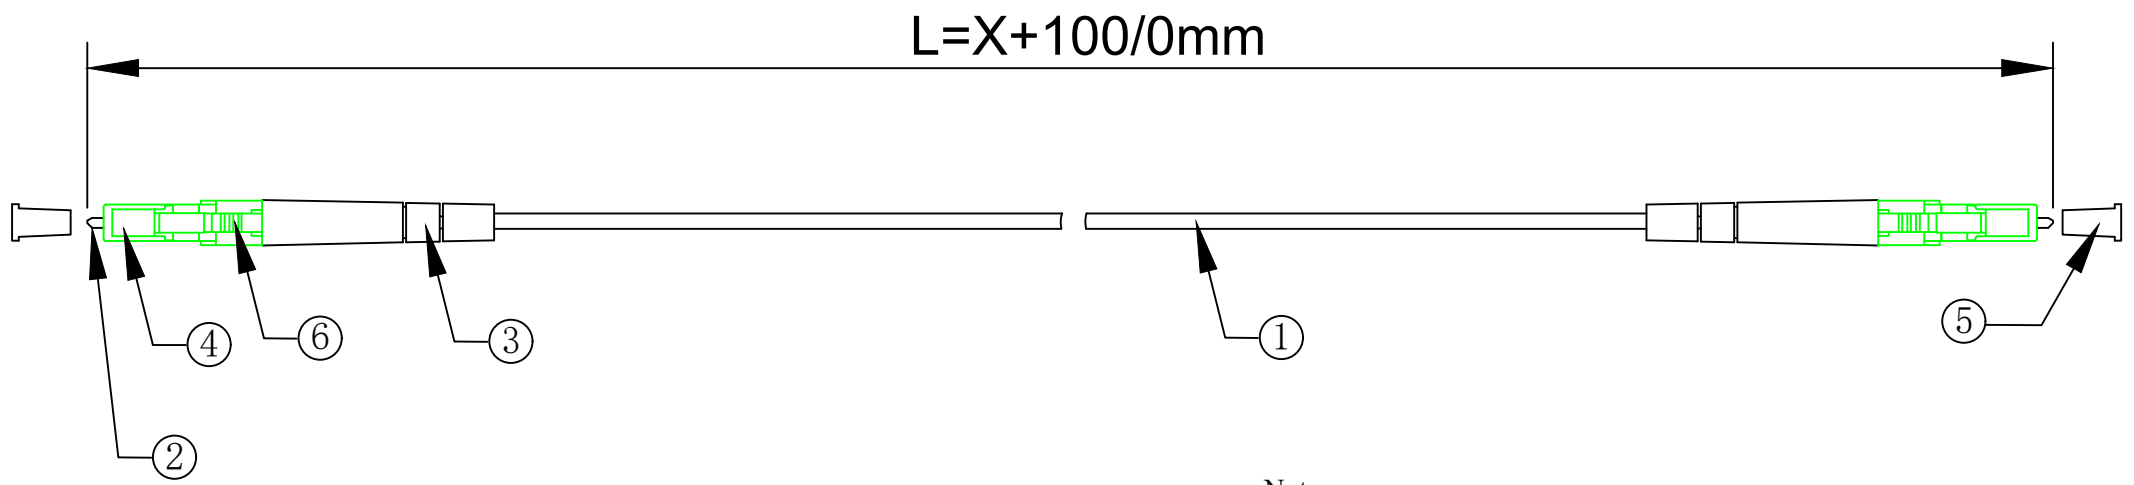

Note:
RoHS 2.0 and REACH Compliant

Test Grade Designation:Each to Reference		
Grade IL/RL	SINGLE-MODE	
Insertion Loss (IL)	≤0.3dB	IEC 61300-3-4
Return Loss(RL)	APC≥60dB	IEC 61300-3-6
Test Wavelength	1310nm	
End face inspection	×400	

MATERIAL LIST:

					ITEM NO.	LENGTH	
⑥	LC Simplex Clip Green			2pcs		21.15.8600	1m
⑤	LC Dust Cap White			2pcs		21.15.8601	2m
④	LC Simplex Connector Green			2pcs		21.15.8602	3m
③	LC 3.0 Boot White			2pcs		21.15.8603	5m
②	LC/APC SM Ferrule			2pcs		DESC. Roline FO Jumper Armoured cable, OS2 Simplex, LSOH, LC/APC-LC/APC	
①	Fiber Optical Cable Simplex OS2 9/125 (G657.A2) Ø3.0mm LSZH White Armored (only Stainless steel spiral pipe, no Stainless Steel braiding)			L+0.1m			
NO.	SPECIFICATION STANDARD			QT'Y	REMARK		
		NEW	2022-01-20	A			
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.			