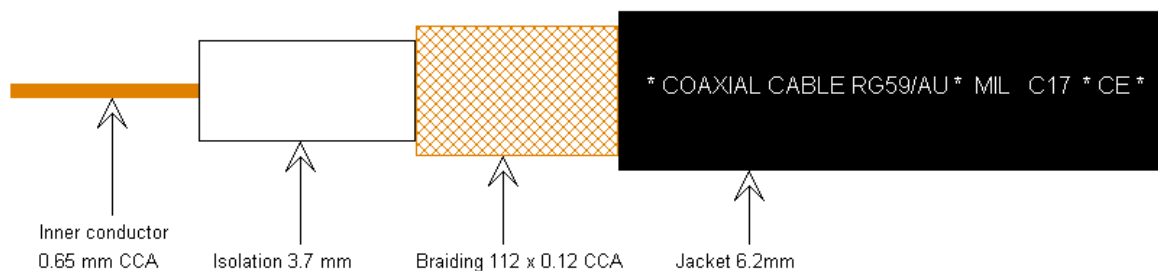

Datasheet 11.99.4520



Cable Construction:



Material	CCA
Isolation	3.7 mm
Material	P.E
Braiding	112x 0.12
Material	CCA
Screening	85 %
Jacket	6.2 mm
Material	PVC

Cable specification:

	20° in dB / 100 m	
	50 MHz	7.9
Attenuation	100 MHz	11.2
	200 MHz	16.1
	400 MHz	23.0
	800 MHz	32.1
	1000 MHz	37.0
Impedance	75 $\Omega \pm 2.5$	
Capacitance	67 pF / m	
Velocity Ratio	66	
Minimum bending radius	60 mm	