
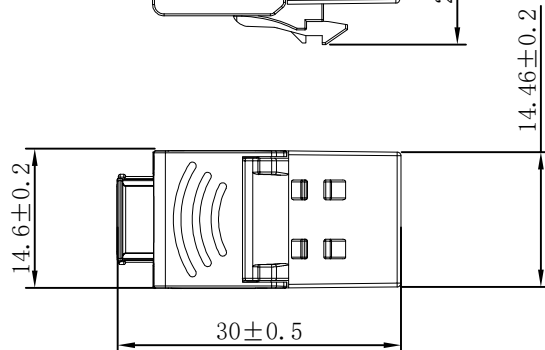


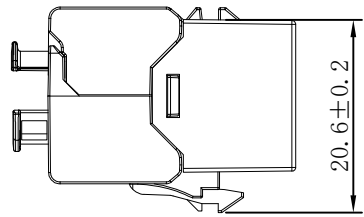


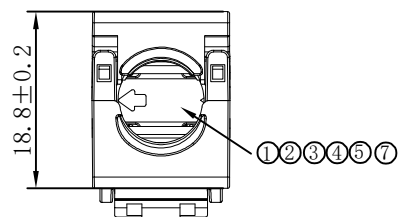

NOTES:

ELECTRICAL:

- 1.Contact Resistance : 20MΩ MAX
2. Insulation Resistance : 500MΩ MIN @ 500V DC
3. Withstand Voltage : DC 1000V AC 700V RMS 60Hz, 1MIN
4. Compliance with Class EA up to 500 MHz to ISO/IEC 11801 Ed.2.2:2011-06
DIN EN 50173-1:2011-09
TIA/EIA-568.2-D (2009-08)
IEC 60603-7 Ed.1 (12/2008)
5. Fluke Test: Permanent Link ISO 11801 (PL2) Class Ea

ENVIRONMENTAL:

1. Storage temperature : -40℃ TO+70℃
2. Operation temperature : -10℃ to+60℃

MECHANICAL

1. SHIELD MATERIAL: ZINC ALLOY
2. IDC MATERIAL: PC TERMINAL: PHOSPHOR BRONZE, TIN PLATING
3. RJ45 Contact Life: 750 Times Min
4. Plug in force: <30N
5. Solid cable: 1/22AWG(0.65MM)-1/26AWG(0.40MM) ID: 1.05MM-1.5MM
6. Cable OD: 5.0mm-8.5mm
7. PoE per IEEE 802.3af, PoE+ per IEEE 802.3at
8. RoHS and REACH Compliant

MATERIAL LIST:

⑦	MODULAR COVER	PC White	1	
⑥	RJ 45 JACK INSERT	PHOSPHOR BRONZE 8P8C GOLD PLATED	8	
⑤	PCB	1.2mm UL	1	
④	IDC BODY	PC White	1	
③	IDC PIN	PHOSPHOR BRONZE & TINNED	8	
②	LABEL COLOR CODE	T568A/B	2	
①	IDC TERMINAL	FOR 22-26AWG(0.40mm-0.65mm) CABLE	1	
NO	PARTS NAME	SPECIFICATION STANDARD	QT'Y	REMARK

		NEW	2022-12-13	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

Accessories:

Instruction Sheet *1pc/inner box
Cable Tie(75X1.9mm) *1Pc

26.11.0391	ROLINE Cat 6A Super Slim Short Keystone toolless, 180 DEGREE, STP, Silver
ITEM NO.	DESC.