


WEIGHT	CUSTOMER NO:	REMARK
		SECOMP

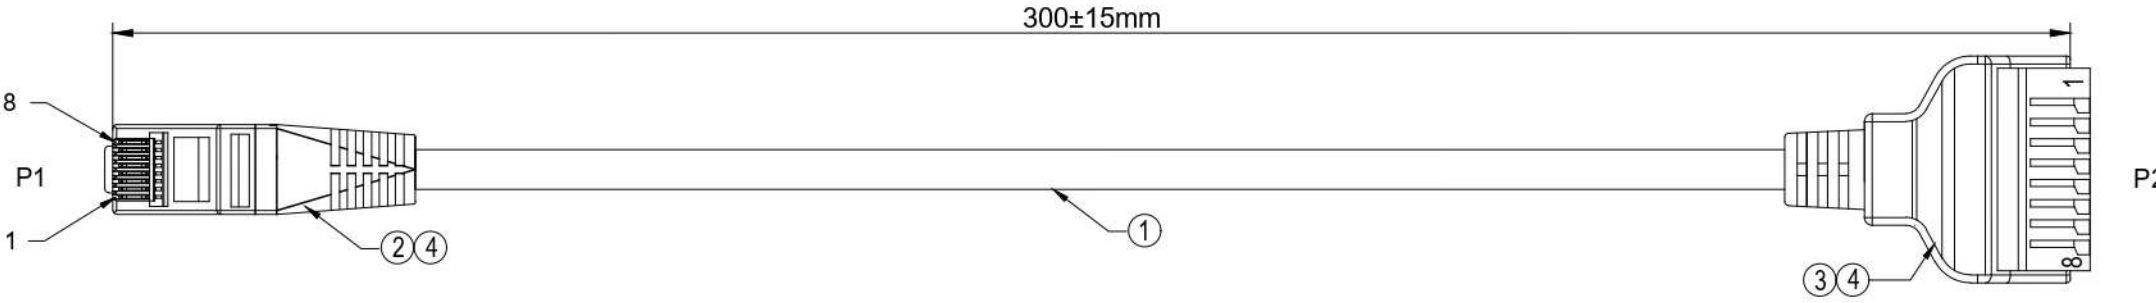

PIN ASSIGNMENT

P1		P2
1	8	1
2		2
3		3
6	8	6
4		4
5	8	5
7		7
8	8	8
S		

NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.

2. ELECTRICAL TEST CONDITION:

(a).100%OPEN,SHORT & MISWIRE TEST,

(b). INSULATOR RESISTANCE:10 Mohm MIN.
DC 300V 0.01sec.

(c). CONTACT RESISTANCE:3ohm MAX.

4	OVERMOLD BLACK PVC 45P MA-001.	
3	TERMINAL BLOCK GREEN 8PIN.	
2	8P8C PLUG WITH NICKLE PLATED SHELL.	
1	UTP CAT5E 24AWG*4P+AE OD:6.0MM L:300mm BLACK PVC JACKET.	
NO.	Description	P/N

A		FIRST EDITION	BAO	2024/07/01
REV.	ECR	DESCRIPTION	C.N.	DATE
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1.0°				
DIMENSIONS		TOLERANCE	TITLE RJ45 M- Push-Teminal Block Connector Cable Adapter	
0.00 TO 30.00mm		±0.10mm	CHKD.	CONF.
30.01 TO 80.00mm		±0.13mm	DR.	APPD.
80.01 TO 150.00mm		±0.15mm	BAO	
150.01mm		±0.20mm	MODEL NO: 12.02.1171	
MATERIAL	MATERIAL		SCALE	REV. A
FINISH	FINISH		SHEET 1 / 1	UNIT MM SIZE A4