


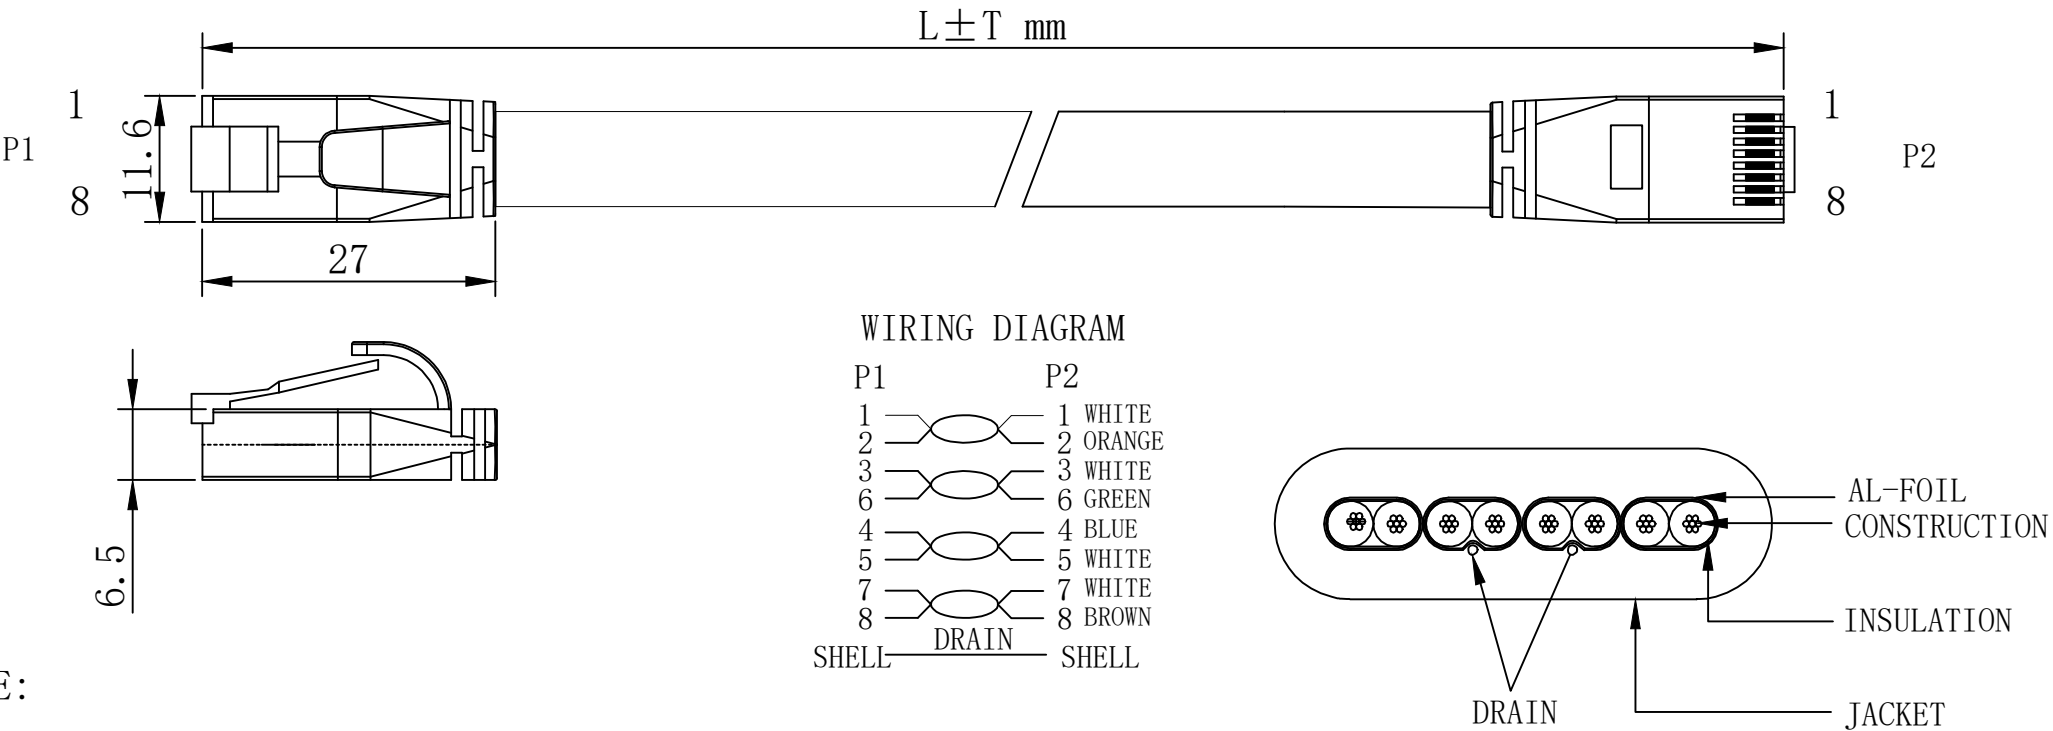

NOTE:

- 1.100% OPEN SHORT, MISS WIRE TEST
- 2.Fluke test
- Test limit:ISO 11801 CHANNEL CLASS EA
- 3.PRINT WORD:CAT.6A U/FTP FLAT CABLE 500MHz
- CONFORM TO ISO/IEC 11801 & EN50173-1 & ANSI/TIA-568-C.2
- 4.ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

|     |            |                                                                                                   |       |        |
|-----|------------|---------------------------------------------------------------------------------------------------|-------|--------|
| ③   | OVER MOLD  | PVC Colour black                                                                                  | 2     |        |
| ②   | CONNECTOR  | RJ45 8P8C shielded Plug,Pin Gold Plated, Transparent red                                          | 2     |        |
| ①   | CABLE      | (32AWG BC*1P+AL-FOIL)*2+(32AWG BC*1P+AL-FOIL+E)*2 JACKET:PVC/black<br>OD:T=1.75±0.2mm W=6.6±0.2MM | 1     |        |
| NO. | PARTS NAME | SPECIFICATION STANDARD                                                                            | QT' Y | REMARK |

|            |           |
|------------|-----------|
| ITEM       | LENGTH    |
| 21.99.0830 | 500±30mm  |
| 21.99.0831 | 1000±30mm |
| 21.99.0834 | 1500±50mm |
| 21.99.0832 | 2000±50mm |
| 21.99.0833 | 3000±70mm |
| 21.99.0835 | 5000±70mm |

|    |     |  |                              |            |       |                                            |
|----|-----|--|------------------------------|------------|-------|--------------------------------------------|
|    |     |  |                              |            | DESC. | VALUE CAT 6A U/FTP FLAT PATCH CABLE, BLACK |
|    |     |  |                              |            |       |                                            |
|    |     |  | NEW                          | 2016-06-01 | A     |                                            |
| BY | CHK |  | REVISION RECORD MODIFICATION | DATE       | REV.  |                                            |